

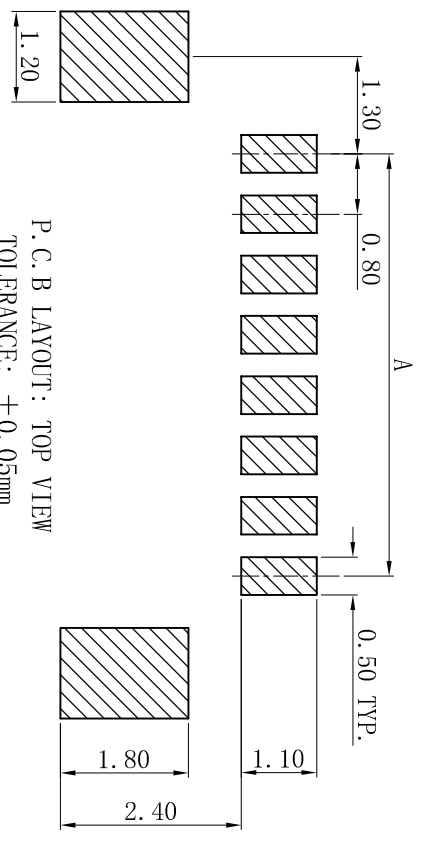
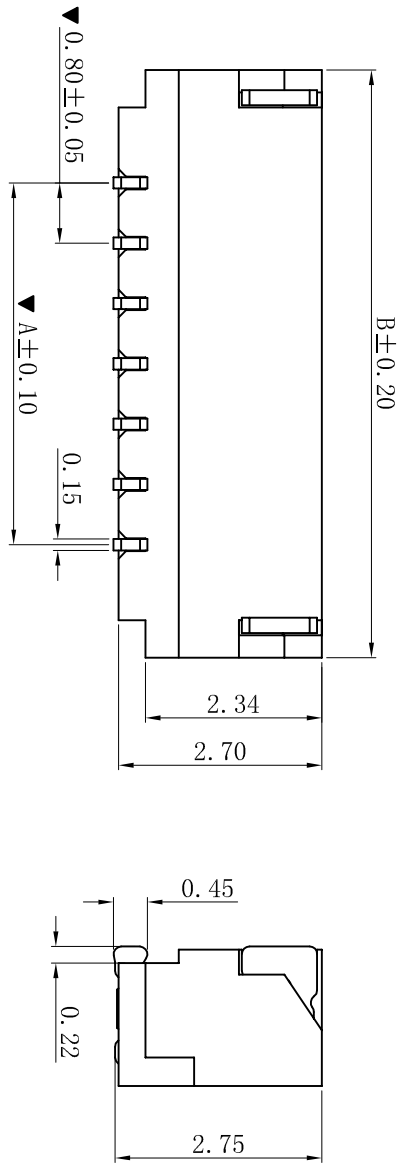


RoHS

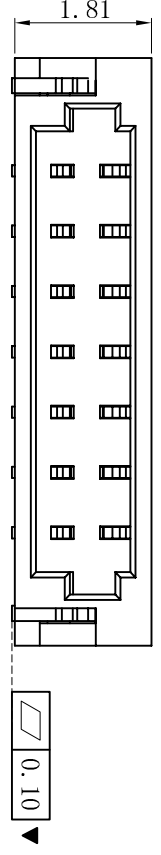

P.C.B LAYOUT: TOP VIEW
TOLERANCE: ±0.05mm

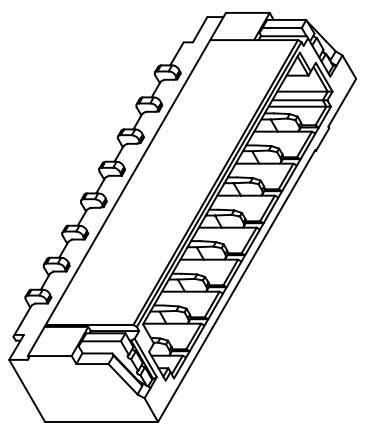

- SPECIFICATIONS**
- Voltage rating: 30V AC, DC
 - Current rating: 0.5A, AC, DC
 - Withstanding Voltage: 200V AC/minute
 - Insulation resistance: 100MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- WAFER**
- Part No.: W0800SR-NP-YL
 - Poles : 02-24P
 - Housing Material: LCP UL94V-0
 - Pin Material: Phosphor Bronze
 - Contact Area Plating: Gold-Flash or Tin plated
 - The Dimension Marked “▼” Must Be Recorded

PART NO.	Dimensions (mm)	
	A	B
02	0.80	3.78
03	1.60	4.58
04	2.40	5.38
05	3.20	6.18
06	4.00	6.98
07	4.80	7.78
08	5.60	8.58
09	6.40	9.38
10	7.20	10.18
11	8.00	10.98
12	8.80	11.78
13	9.60	12.58
14	10.40	13.38
15	11.20	14.18
16	12.00	14.98
17	12.80	15.78
18	13.60	16.58
19	14.40	17.38
20	15.20	18.18
21	16.00	18.98
22	16.80	19.78
23	17.60	20.58
24	18.40	21.38

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

更新图面		2019-06-03	陈雄军	更新图面	2019-09-04	胡进
修订版本		2015-11-04	陈雄军	审核/DR	2019-09-04	胡进
变更图宽格式内容		2013-12-27	陈雄军	审核/CHK	2019-09-04	胡进
新版本		2011-05-24	陈雄军	核准/APPRO	2019-09-04	胡进
说明			承认	日期/DATE		
版次			APPRO.	日期/DATE		
REV.				日期/DATE		

投影法	第一角	单位	MM	品名	0.80mm SMT 90° Wafer
比例/Scale	1:1	大小/Size	A4	(PART NAME)	Connector Series
页码/SHEET	1/1	版本/Rev	D	料号	W0800SR-NP-YL
				(PART NO)	
				状态码	C