
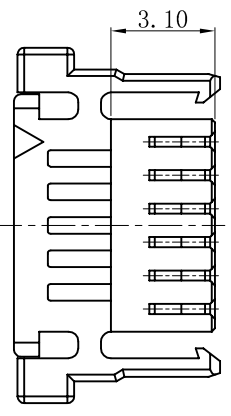

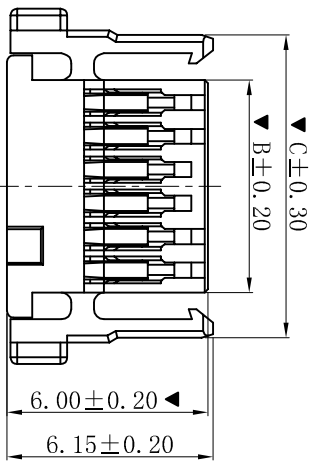


ROHS

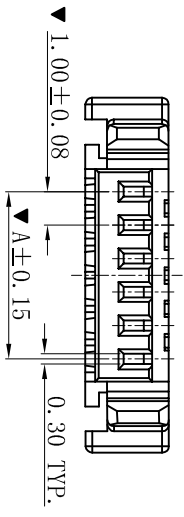

■ SPECIFICATIONS

- Voltage rating: 125V AC, DC
- Current rating: 1A, AC, DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 100MΩ min
- Temperature range: -25° C~+85° C

■ HOUSING

- Part No.: H1001K-NP
- Poles : 02-20P
- Housing Material: PA66 UL94V-0
- The Dimension Marked “▼” Must Be Recorded

Poles	Dimensions (mm)			
	A	B	C	D
02	1.00	2.30	5.00	6.60
03	2.00	3.30	6.00	7.60
04	3.00	4.30	7.00	8.60
05	4.00	5.30	8.00	9.60
06	5.00	6.30	9.00	10.60
07	6.00	7.30	10.00	11.60
08	7.00	8.30	11.00	12.60
09	8.00	9.30	12.00	13.60
10	9.00	10.30	13.00	14.60
11	10.00	11.30	14.00	15.60
12	11.00	12.30	15.00	16.60
13	12.00	13.30	16.00	17.60
14	13.00	14.30	17.00	18.60
15	14.00	15.30	18.00	19.60
16	15.00	16.30	19.00	20.60
17	16.00	17.30	20.00	21.60
18	17.00	18.30	21.00	22.60
19	18.00	19.30	22.00	23.60
20	19.00	20.30	23.00	24.60

XYDZ® 东莞市祥运连接器有限公司
 Dongguan XiangYun Connectors CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .000±0.20 ANGLE: ±1°
绘图/DR	陈雄军
审核/CHECK	陈雄军
批准/APPRO	胡进
日期/DATE	2019-06-03

更新图面	2019-06-03	陈雄军
修订版本	2015-11-04	陈雄军
变更图宽格式内容	2013-12-27	陈雄军
新版本	2011-05-24	陈雄军
说明		承认

版次 REV.	1	2	3	4	5	6	7	8	9	10
DESCRIPTION										

投影法	第一角	品名	SH 1.00mm 带扣 Housing	
单位 Unit	MM	(PART NAME)	Connector Series	
比例/Scale	1:1	料号	H1001K-NP	
大小/SIZE	A4	(PART NO)		
页码/SHEET	1/1	状态码	C	
版本/Rev	D			