
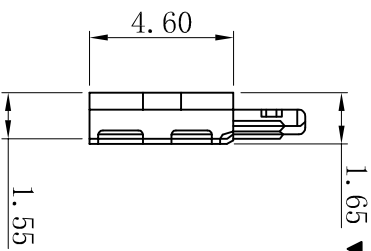
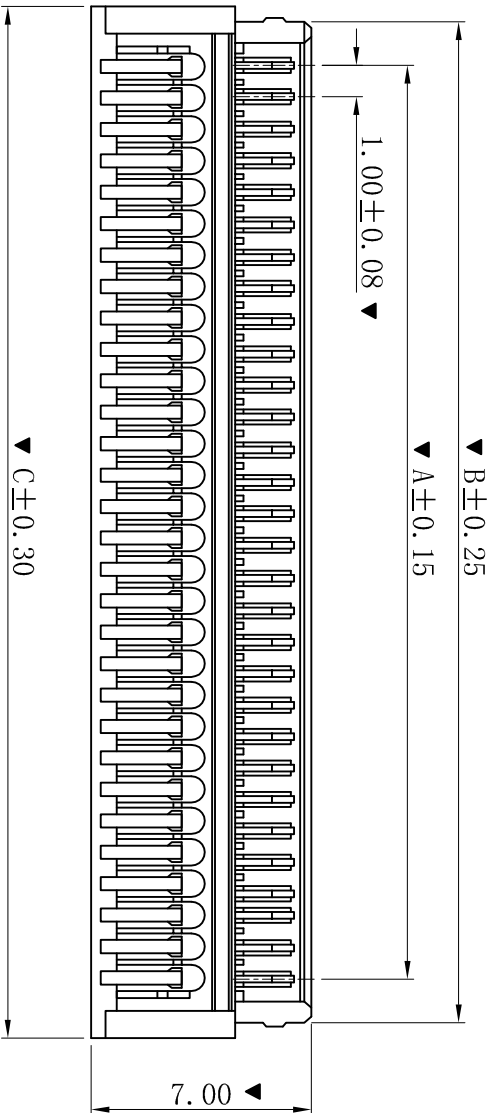


RoHS



- SPECIFICATIONS
- Voltage rating: 150V AC, DC
 - Current rating: 1A, AC, DC
 - Withstanding Voltage: 500V AC/minute
 - Insulation resistance: $100M\Omega$ min
 - Temperature range: $-25^{\circ}C \sim +85^{\circ}C$

- HOUSING
- Part No.: HI006A-NP
 - Poles : 20P 30P
 - Housing Material: PA66 UL94V-0
 - The Dimension Marked “▼” Must Be Recorded

Part No	Dimensions (mm)		
	A	B	C
20	19.00	22.00	23.40
30	29.00	32.00	33.40

D	更新图面	2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE: 0±0.30 .00±0.25 .000±0.20 ANGLE: ±1°
C	修订版本	2015-11-04	陈雄军	绘图/DR 陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军	审核/CHECK 陈雄军
A	新版本	2011-05-24	陈雄军	核准/APPRO 胡进
H	说明	日期	承认	日期/DATE
1	版次	RRV.	APPRO.	2019-06-03

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

投影法 Projection	品名 (PART NAME)	料号 (PART NO)	状态码
第一角画法 MM	FI-X 1.00mm Housing Connector Series	HI006A-NP	C
单位 Unit	大小/SIZE	页码/SHEET	版本/Rev
MM	A4	1/1	D

1 2 3 4 5 6 7 8 9 10