

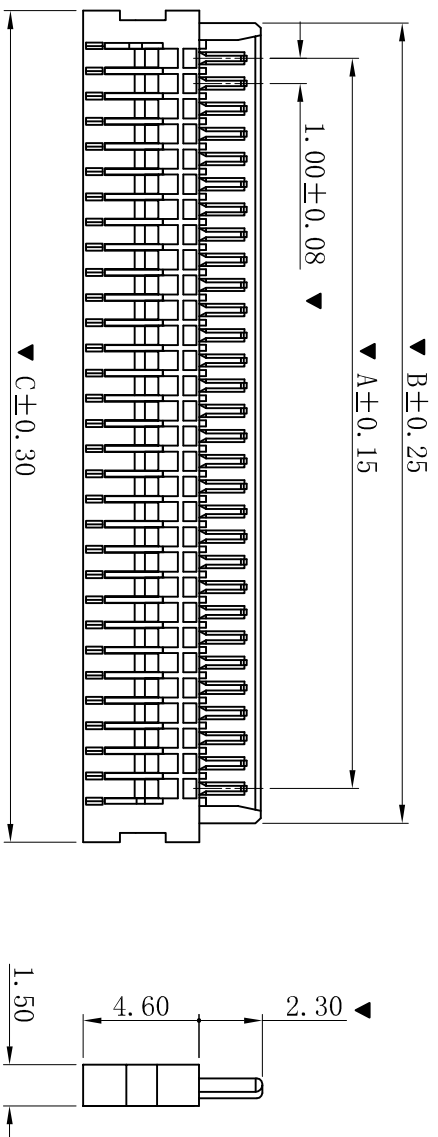


RoHS

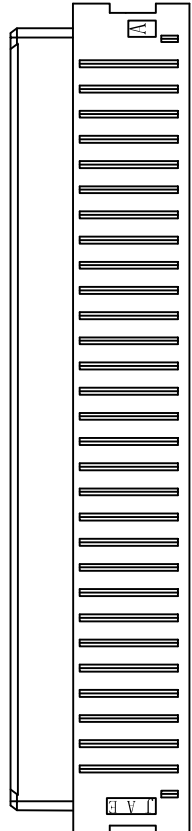

- SPECIFICATIONS
- Voltage rating: 150V AC, DC
 - Current rating: 1A, AC, DC
 - Withstanding Voltage: 500V AC/minute
 - Insulation resistance: 100MΩ min
 - Temperature range: -25°C~+85°C
- HOUSING
- Part No.: H1006B-NP
 - Poles : 20P 30P
 - Housing Material: PA66 UL94V-0
 - The Dimension Marked “▼” Must Be Recorded



Part No	Dimensions (mm)		
	A	B	C
20	19.00	22.00	23.40
30	29.00	32.00	33.40

D	更新图面	2019-06-03	陈雄军							
C	修订版本	2015-11-04	陈雄军							
B	变更图宽格式内容	2013-12-27	陈雄军							
A	新版本	2011-05-24	陈雄军							
H	说明	日期	承认							
1	版次	REV.	APPRO.							
1	1	2	3	4	5	6	7	8	9	10

一般公差	0±0.30
GENERAL TOLERANCE:	.00±0.25
	.000±0.20
	.000±0.05
ANGLE: ±1°	
绘图/DR	陈雄军
审核/CHECK	陈雄军
核准/APPRO	胡进
日期/DATE	2019-06-03

XYDZ® 东莞市祥运连接器有限公司
 Dongguan XiangYun Connectors CO., Ltd

投影法
 Projection
 单位 Unit
 MM
 比例/Scale
 1:1
 大小/Size
 A4
 页码/SHEET
 1/1
 版本/Rev
 D

品名
 (PART NAME)
 FI-X 1.00mm Housing
 Connector Series

料号
 (PART NO)
 H1006B-NP

状态码
 C