

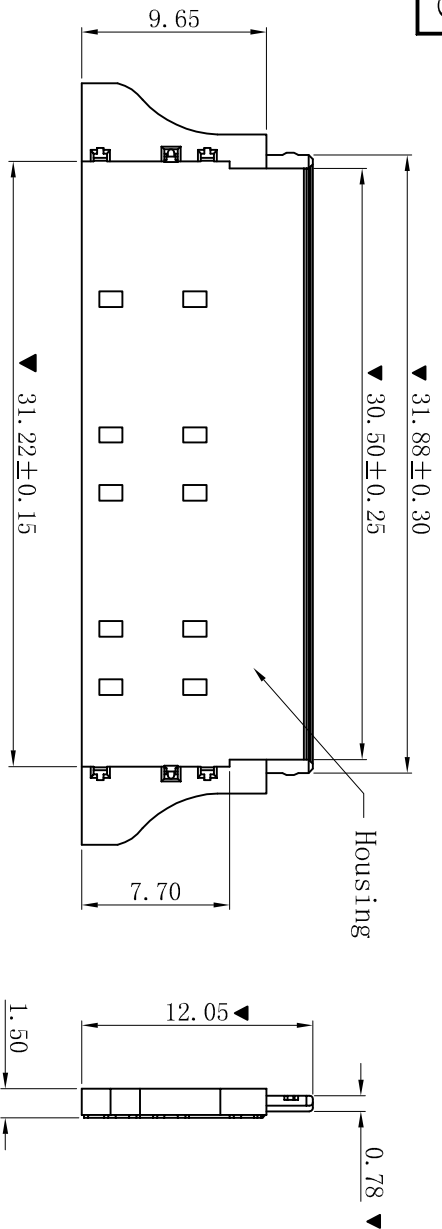


ROHS



- SPECIFICATIONS
- Voltage rating: 150V AC, DC
 - Current rating: 1A, AC, DC
 - Withstanding Voltage: 500V AC/minute
 - Insulation resistance: 100M Ω min
 - Temperature range: -25 $^{\circ}$ C~+85 $^{\circ}$ C
- HOUSING
- Part No. : HI006F-30P
 - Housing Material: PA66 UL94V-0
 - The Dimension Marked "▼" Must Be Recorded

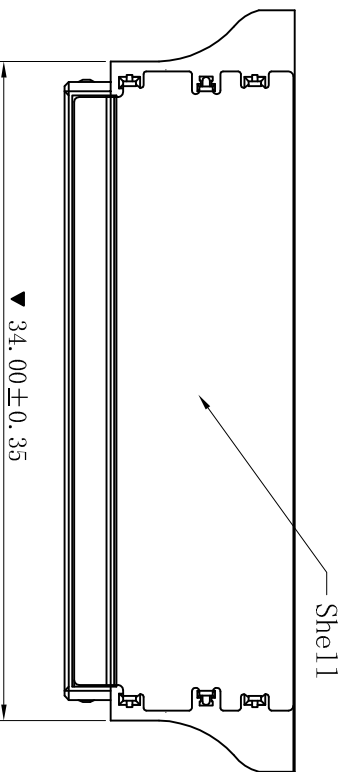

D	更新图面	2019-06-03	陈雄军
C	修打版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军
H	说明	日期	承认
1	版次	REV.	APPRO.

一般公差		0 \pm 0.30
GENERAL TOLERANCE:		.00 \pm 0.25
		.000 \pm 0.20
		.000 \pm 0.05
ANGLE: \pm 1 $^{\circ}$		
绘图/DR	陈雄军	2019-06-03
审核/CHECK	陈雄军	
批准/APPRO	胡进	
日期/DATE	2019-06-03	

XYDZ[®] 东莞市祥运连接器有限公司
 Dongguan XiangYun Connectors CO., Ltd

投影法 Projection	第一角投影
单位 Unit	MM
比例/Scale	1:1
大小/Size	A4
页码/SHEET	1/1
版本/Rev	D

品名 (PART NAME)	FI-E 1.00mm Housing Connector Series
料号 (PART NO)	HI006F-30P
状态码	C