
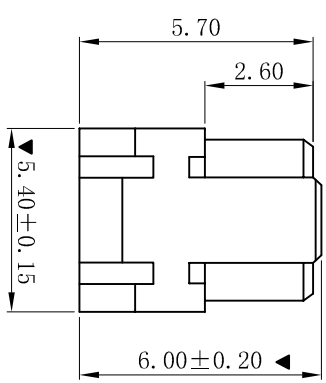


RoHS

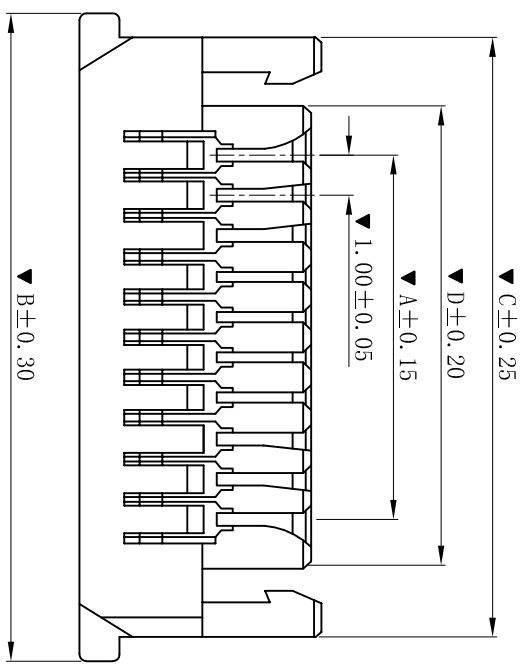

- SPECIFICATIONS
- Voltage rating: 50V AC, DC
 - Current rating: 1A, AC, DC
 - Withstanding Voltage: 500V AC/minute
 - Insulation resistance: 100M Ω min
 - Temperature range: -25 $^{\circ}$ C +85 $^{\circ}$ C
- HOUSING
- Part No.: H1009-2xNP
 - Poles : 20P, 30P, 40P, 50P
 - Housing Material: PA66 UL94V-0
 - The Dimension Marked “▼” Must Be Recorded

Part No	Dimensions (mm)			
	A	B	C	D
2x10	9.00	15.70	14.70	10.70
2x15	14.00	20.70	19.70	15.70
2x20	19.00	25.70	24.70	20.70
2x25	24.00	30.70	29.70	25.70

更新图面		2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE: 0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE: ±1 $^{\circ}$	绘图/DR 陈雄军	审核/CHECK 胡进	日期/DATE 2019-06-03	投影法 Projection 第一角	单位 Unit MM	品名 (PART NAME) SHLD 1.00mm Housing Connector Series	料号 (PART NO) H1009-2xNP	状态码 C
修打版本		2015-11-04	陈雄军		审核/CHECK 陈雄军	日期/DATE 2019-06-03	版本/Rev D					
变更图宽格式内容		2013-12-27	陈雄军		审核/CHECK 陈雄军							
新版本		2011-05-24	陈雄军		审核/CHECK 胡进							
说明		日期	承认		日期/DATE							
DESCRPTION		DATE	APPRO.		日期/DATE							
版次												
REV.												

XYDZ[®] 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd