

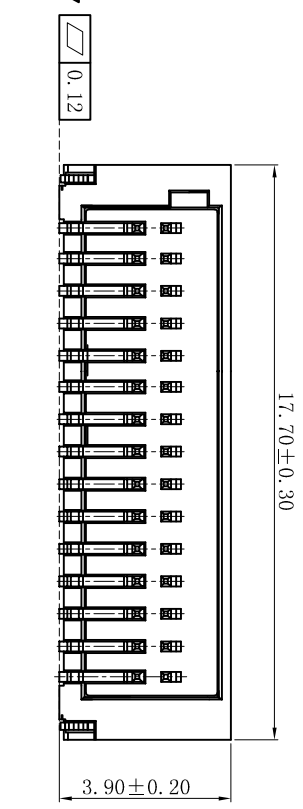


RoHS

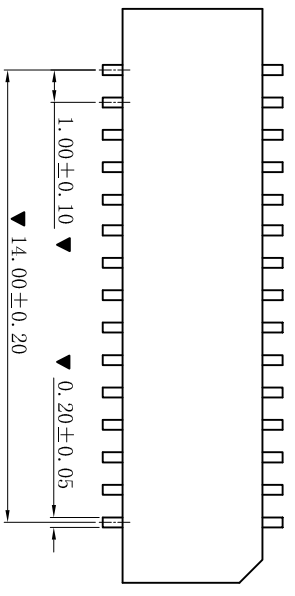

P. C. B LAYOUT: TOP VIEW  
TOLERANCE: ±0.05mm

- SPECIFICATIONS
- Voltage rating: 50V AC, DC
  - Current rating: 1A, AC, DC
  - Withstanding Voltage: 500V AC/minute
  - Insulation resistance: 100MΩ min
  - Temperature range: -25° C~+85° C
  - Contact resistance: 20mΩ max

- WAFER
- Part No.: W1001SR-2x15P-B
  - Poles: 2x15P
  - Housing Material: PA46 UL94V-0
  - Pin Material: Brass
  - Contact Area Plating: Gold-flash
  - The Dimension Marked “▼” Must Be Recorded

更新图面		2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05	XYDZ® 东莞市祥运连接器有限公司 Connectors Dongguan XiangYun Connectors CO., Ltd		品名 (PART NAME)		SH1.00mm SMT 90° Wafer Connector Series	
修订版本		2015-11-04	陈雄军	绘图/DR	ANGLE: ±1°	投影法 Projection		料号 (PART NO)		W1001SR-2x15P-B	
变更图宽格式内容		2013-12-27	陈雄军	审核/CHECK	胡进	单位 Unit		状态码		C	
新版本		2011-05-24	陈雄军	核准/APPRO	胡进	比例/Scale		页码/SHEET		1/1	
说明		2011-05-24	陈雄军	日期 DATE:	2019-06-03	大小/SIZE		版本/Rev		D	
版次 REV.		1	承认 APPRO.	日期 DATE:	2019-06-03	页码/SHEET		版本/Rev		D	