
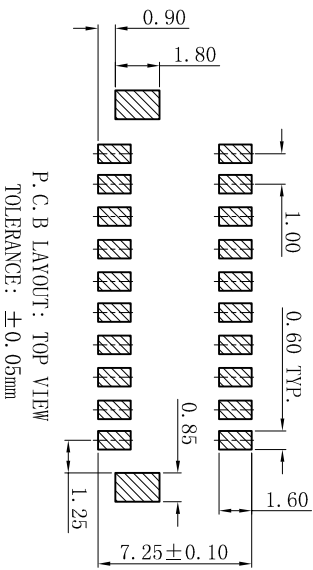
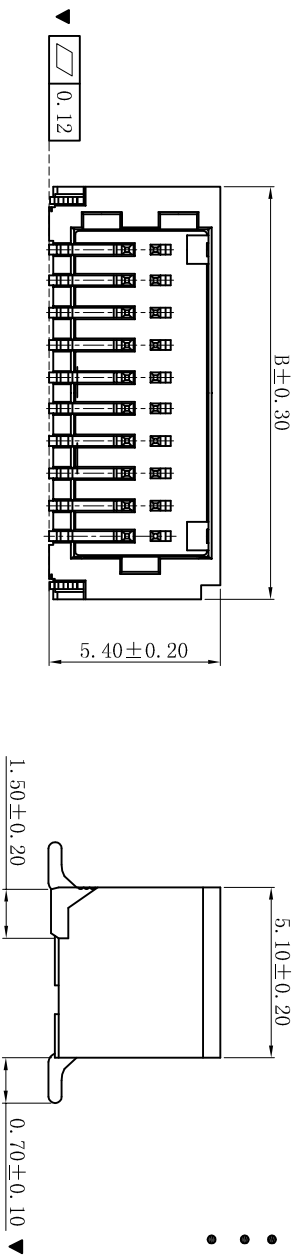


RoHS

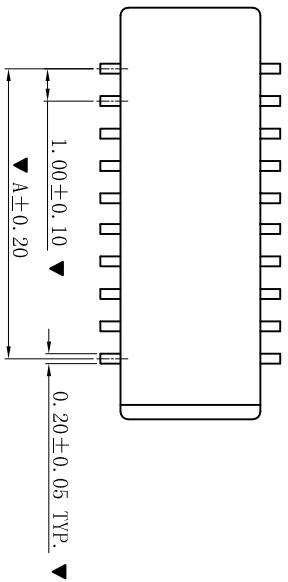

- SPECIFICATIONS
- Voltage rating: 50V AC, DC
 - Current rating: 1A, AC, DC
 - Withstanding Voltage: 500V AC/minute
 - Insulation resistance: 100MΩ min
 - Temperature range: -25° C ~ +85° C
 - Contact resistance: 20mΩ max

■ WAFER

- Part No. : W1001SR-2xNP
- Poles : 10-50P
- Housing Material: PA6T UL94V-0
- Pin Material: Phosphor Bronze
- Contact Area Plating: Gold-flash
- The Dimension Marked “▼” Must Be Recorded

Poles	Dimensions (mm)	
	A	B
2x05	4.00	8.10
2x06	5.00	9.10
2x08	7.00	11.10
2x10	9.00	13.10
2x15	14.00	18.10
2x20	19.00	23.10
2x25	24.00	28.10

D	更新图面	2019-06-03	陈雄军	更新图面
C	修订版本	2015-11-04	陈雄军	修订版本
B	变更图宽格式内容	2013-12-27	陈雄军	变更图宽格式内容
A	新版本	2011-05-24	陈雄军	新版本
H	说明	日期	承认	说明
1	版次	REV.	DESCRIPTION	版次

一般公差	0±0.30
GENERAL TOLERANCE:	.00±0.25
	.000±0.20
	.000±0.05
ANGLE:	±1°

绘图/DR	陈雄军
审核/CHECK	胡进
批准/APPRO	胡进
日期/DATE	2019-06-03

XYDZ® 东莞市祥运连接器有限公司
 Dongguan XiangYun Connectors CO., Ltd

投影法: 单位: MM
 比例/Scale: 1:1
 大小/Size: A4
 页码/SHEET: 1/1
 版本/Rev: D

品名: SH1.00mm SMT 90° Wafer Connector Series
 (PART NAME)

料号: W1001SR-2xNP
 (PART NO)

状态码: C