


RoHS

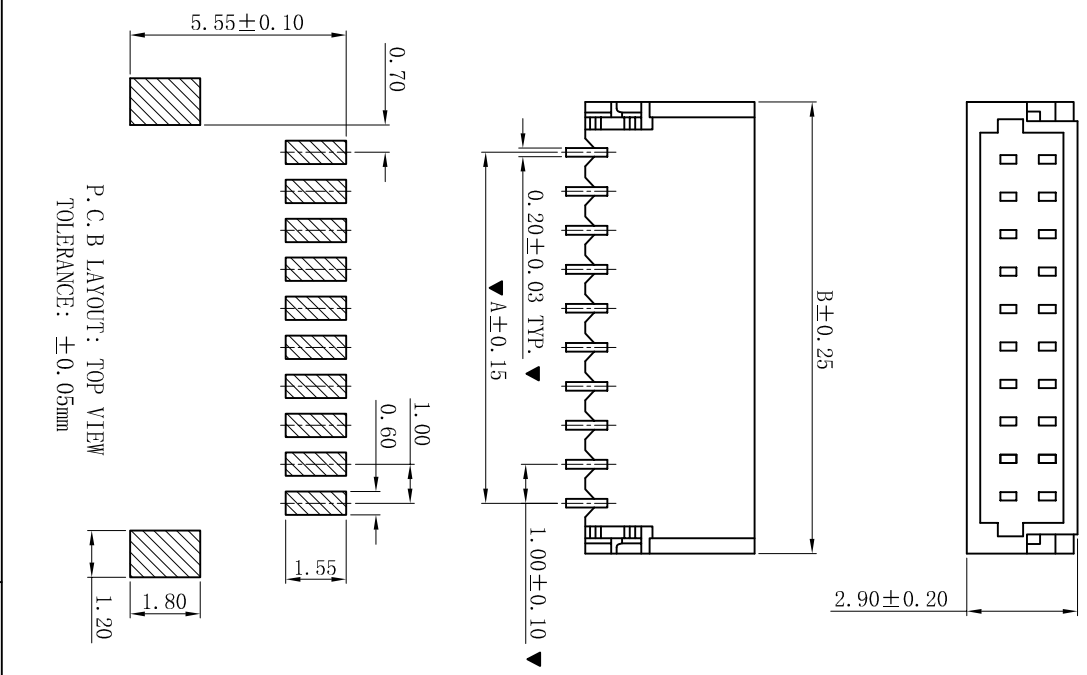

P.C.B LAYOUT: TOP VIEW
TOLERANCE: ±0.05mm

■ SPECIFICATIONS

- Voltage rating: 50V AC, DC
- Current rating: 1A, AC, DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 100MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No.: W1001SR-NP
- Poles : 02-20P
- Housing Material: PA6T UL94V-0
- Pin Material: Phosphor Bronze
- Contact Area Plating: Tin-Plated
- The Dimension Marked “▼” Must Be Recorded

Poles	Dimensions (mm)	
	A	B
02	1.00	4.00
03	2.00	5.00
04	3.00	6.00
05	4.00	7.00
06	5.00	8.00
07	6.00	9.00
08	7.00	10.00
09	8.00	11.00
10	9.00	12.00
11	10.00	13.00
12	11.00	14.00
13	12.00	15.00
14	13.00	16.00
15	14.00	17.00
16	15.00	18.00
17	16.00	19.00
18	17.00	20.00
19	18.00	21.00
20	19.00	22.00

更新图面		2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE: 0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE: ±1°		投影法 Projection 单位 Unit MM		品名 (PART NAME) SH1.00mm SMT 90° Wafer Connector Series		料号 (PART NO.) W1001SR-NP	状态码 C	
修订图面		2015-11-04	陈雄军	绘图/DR P.C. Draw		比例/Scale 1:1		料号 (PART NO.) W1001SR-NP				
变更图宽格式内容		2013-12-27	陈雄军	审核/CHECK 胡进		大小/Size A4		料号 (PART NO.) W1001SR-NP		说明 DESCRIPTION	日期 DATE: 2011-05-24	承认 APPRO.
新版本		2011-05-24	陈雄军	核准/APPRO		页码/SHEET 1/1		版本/Rev D				
版次 REV.		1	说明 DESCRIPTION		日期 DATE:		承认 APPRO.		日期 DATE:		承认 APPRO.	

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd