
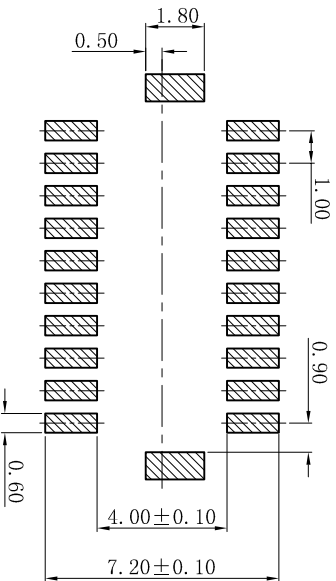

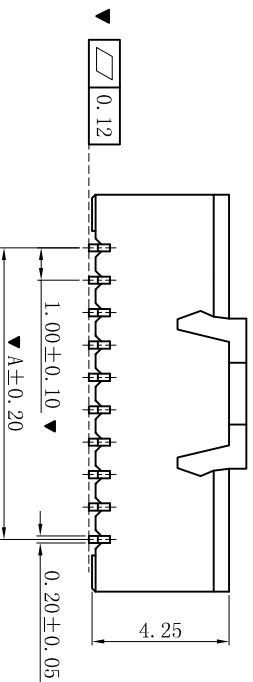


RoHS

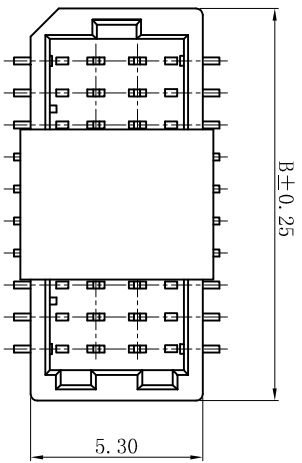

P.C.B LAYOUT: TOP VIEW
TOLERANCE: ± 0.05mm

■ SPECIFICATIONS

- Voltage rating: 50V AC, DC
- Current rating: 1A, AC, DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 100MΩ min
- Temperature range: -25° C ~ +85° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No. : W1001SV-2xNP
- Poles : 10-50P
- Housing Material : PA6T UL94V-0
- Cap : PA6T UL94V-0
- Pin Material : Phosphor Bronze
- Contact Area Plating : Gold-flash
- The Dimension Marked "▼" Must Be Recorded

Poles	Dimensions (mm)	
	A	B
2x05	4.00	7.30
2x06	5.00	8.30
2x08	7.00	10.30
2x10	9.00	12.30
2x15	14.00	17.30
2x20	19.00	22.30
2x25	24.00	27.30

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connector s CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .000±0.05
ANGLE: ±1°	
绘图/DR	陈雄军
审核/CHECK	胡进
批准/APPRO	
日期/DATE	2019-06-03

投影法 Projection	第一角投影
单位 Unit	MM
比例/Scale	1:1
大小/SIZE	A4
页码/SHEET	1/1
版本/Rev	D
品名 (PART NAME)	SH1.00mm SMT 180° Wafer Connector Series
料号 (PART NO)	W1001SV-2xNP
状态码	C

更新图面	2019-06-03	陈雄军
修订版本	2015-11-04	陈雄军
变更图宽格式内容	2013-12-27	陈雄军
新版本	2011-05-24	陈雄军
说明 DESCRIPTION	日期 DATE	承认 APPRO.

版次 REV.	1	2	3	4	5	6	7	8	9	10
------------	---	---	---	---	---	---	---	---	---	----