


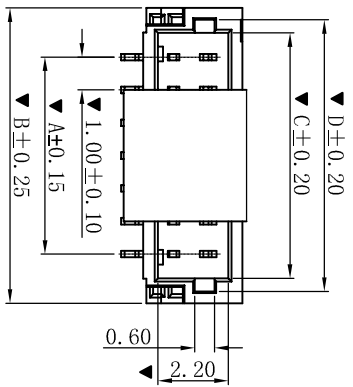


ROHS HF

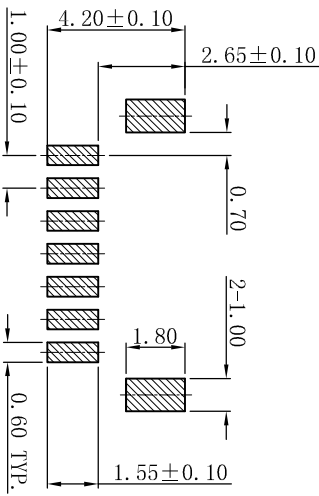

3D VIEW

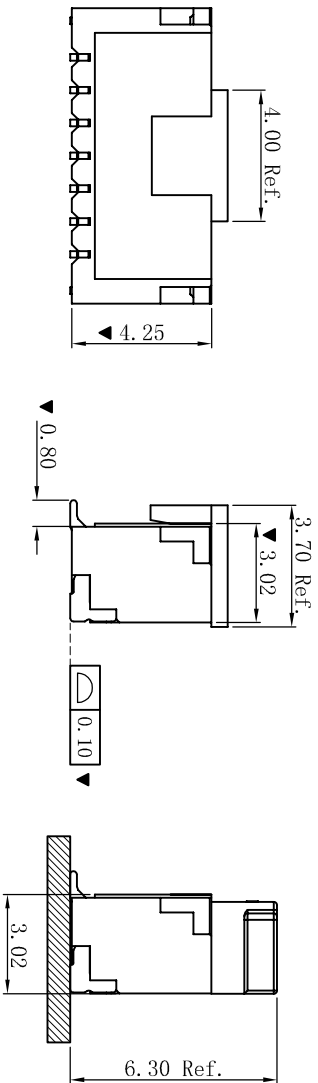

P.C.B LAYOUT: TOP VIEW
TOLERANCE: ±0.05mm

- SPECIFICATIONS
- Voltage rating: 50V AC, DC
 - Current rating: 1A, AC, DC
 - Withstanding Voltage: 500V AC/minute
 - Insulation resistance: 100MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- WAFER
- Part No. : W1001SV-NP-4TSW-HF-SS
 - Housing Material: PA4T U194V-0, Halogen Free
 - Pin Material: Phosphor Bronze
 - Contact Area Plating: Matte Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

Poles	Dimensions (mm)				Dimensions (mm)				
	A	B	C	D	A	B	C	D	
02	1.00	4.00	2.48	3.28	12	11.00	14.00	12.48	13.28
03	2.00	5.00	3.48	4.28	13	12.00	15.00	13.48	14.28
04	3.00	6.00	4.48	5.28	14	13.00	16.00	14.48	15.28
05	4.00	7.00	5.48	6.28	15	14.00	17.00	15.48	16.28
06	5.00	8.00	6.48	7.28	16	15.00	18.00	16.48	17.28
07	6.00	9.00	7.48	8.28	17	16.00	19.00	17.48	18.28
08	7.00	10.00	8.48	9.28	18	17.00	20.00	18.48	19.28
09	8.00	11.00	9.48	10.28	19	18.00	21.00	19.48	20.28
10	9.00	12.00	10.48	11.28	20	19.00	22.00	20.48	21.28
11	10.00	13.00	11.48	12.28	24	23.00	26.00	24.48	25.28

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

一般公差
GENERAL TOLERANCE:
ANGLE: ±1°

绘图/DR
审核/CHECK
批准/APPRO

投影法
单位 Unit
比例/Scale

品名
(PART NAME)
SH1.00mm SMT 180° Wafer
Connector Series

日期/DATE
2019-04-04

日期/DATE
2019-04-04

料号
(PART NO)
W1001SV-NP-4TSW-HF-SS

版本号 REV. A	说明 DESCRIPTION	日期 DATE	承认 APPRO.	日期/DATE	日期/DATE	版本/Rev	料号 (PART NO)	状态码
1	新版本	2019-04-04	P.P. Daw	2019-04-04	胡进	A	W1001SV-NP-4TSW-HF-SS	C