

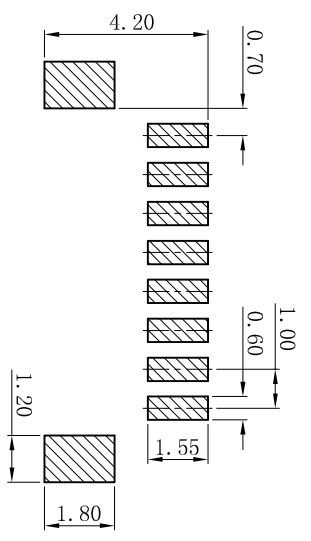
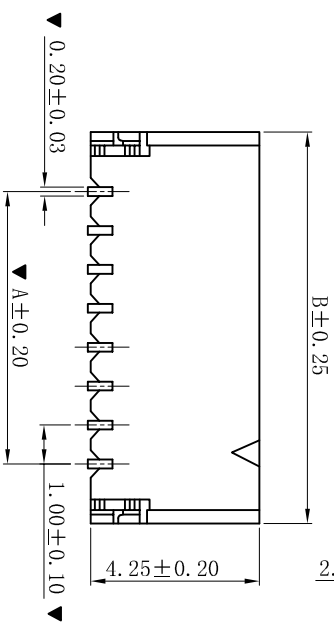



RoHS

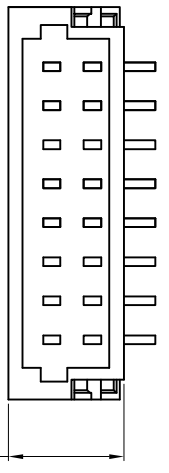

P.C.B LAYOUT: TOP VIEW
TOLERANCE: ± 0.05mm

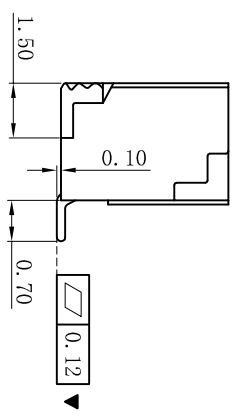

CAP
(FOR PICK AND PLACE SYSTEMS)



- SPECIFICATIONS
- Voltage rating: 50V AC, DC
 - Current rating: 1A, AC, DC
 - Withstanding Voltage: 500V AC/minute
 - Insulation resistance: 100MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max

■ WAFER

- Part No. : W1001SV-NP
- Poles : 02-20P
- Housing Material : PA6T UL94V-0
- Cap Material : PA6T UL94V-0
- Pin Material : Phosphor Bronze
- Contact Area Plating: Tin-plated
- The Dimension Marked "▼" Must Be Recorded

PART NO.	Dimensions (mm)	
	A	B
02	1.00	4.00
03	2.00	5.00
04	3.00	6.00
05	4.00	7.00
06	5.00	8.00
07	6.00	9.00
08	7.00	10.00
09	8.00	11.00
10	9.00	12.00
11	10.00	13.00
12	11.00	14.00
13	12.00	15.00
14	13.00	16.00
15	14.00	17.00
16	15.00	18.00
17	16.00	19.00
18	17.00	20.00
19	18.00	21.00
20	19.00	22.00

D	更新图面	2019-06-03	陈雄军	承认	日期	2019-06-03
C	修订版本	2015-11-04	陈雄军	承认	日期	2015-11-04
B	变更图宽格式内容	2013-12-27	陈雄军	承认	日期	2013-12-27
A	新版本	2011-05-24	陈雄军	承认	日期	2011-05-24
H	说明					
1	版次					
1	REV.					

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

投影法
Connector's

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05
角度: ±1°	

绘图/DR	陈雄军
审核/CHECK	陈雄军
批准/APPRO	胡进

单位 Unit	MM
比例/Scale	1:1
大小/Size	A4
页码/SHEET	1/1
版本/Rev	D

品名 (PART NAME)	料号 (PART NO)	状态码
SH1.00mm SMT 180° Wafer Connector Series	W1001SV-NP	C