
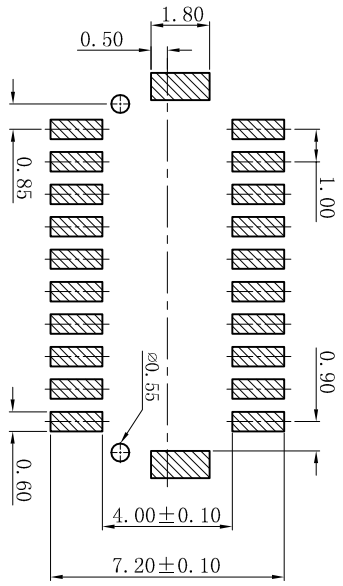
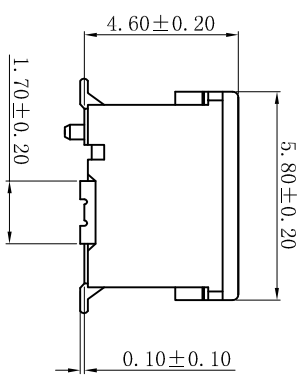
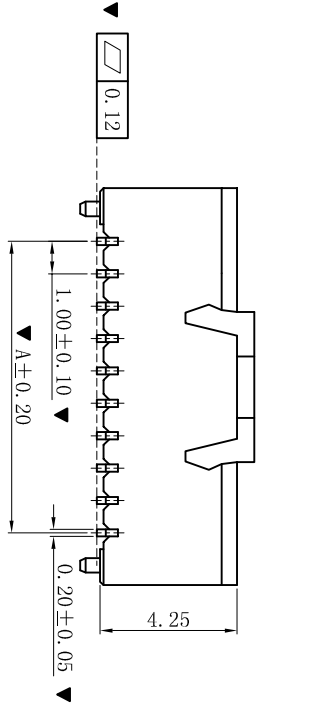


RoHS

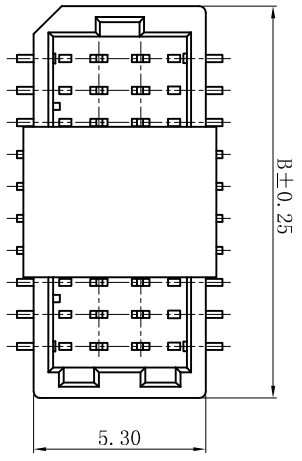

P.C.B LAYOUT: TOP VIEW
TOLERANCE: ±0.05mm

- SPECIFICATIONS
- Voltage rating: 50V AC, DC
 - Current rating: 1A, AC, DC
 - Withstanding Voltage: 500V AC/minute
 - Insulation resistance: 100MΩ min
 - Temperature range: -25°C~+85°C
 - Contact resistance: 20mΩ max

- WAFER
- Part No.: W1001SVD-2xNP
 - Poles: 10-50P
 - Housing Material: PA6T UL94V-0
 - Cap: PA6T UL94V-0
 - Pin Material: Phosphor Bronze
 - Contact Area Plating: Gold-flash
 - The Dimension Marked "▼" Must Be Recorded

Poles	Dimensions (mm)	
	A	B
2x05	4.00	7.30
2x06	5.00	8.30
2x08	7.00	10.30
2x10	9.00	12.30
2x15	14.00	17.30
2x20	19.00	22.30
2x25	24.00	27.30

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connector's CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .000±0.15
ANGLE: ±1°	

更新图面	2019-06-03	陈雄军
修订版本	2015-11-04	陈雄军
变更图宽格式内容	2013-12-27	陈雄军
新版本	2011-05-24	陈雄军

说明	日期	承认
DESCRIPTION	DATE:	APPRO.

投影法
Projection

品名
(PART NAME)

料号
(PART NO)

更新图面	2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .000±0.15	ANGLE: ±1°	投影法 Projection	品名 (PART NAME)	料号 (PART NO)
修订版本	2015-11-04	陈雄军	审核/CHECK	陈雄军	胡进	单位 Unit	SH1.00mm SMT 180° Wafer	W1001SVD-2xNP
变更图宽格式内容	2013-12-27	陈雄军	核准/APPRO	胡进	日期/DATE	大小/SCALE	Connector Series	状态码
新版本	2011-05-24	陈雄军	日期/DATE	2019-06-03	日期/DATE	页码/SHEET		
说明	日期	承认	日期/DATE	2019-06-03	日期/DATE	版本/REV		
DESCRIPTION	DATE:	APPRO.	日期/DATE	2019-06-03	日期/DATE	版本/REV		