

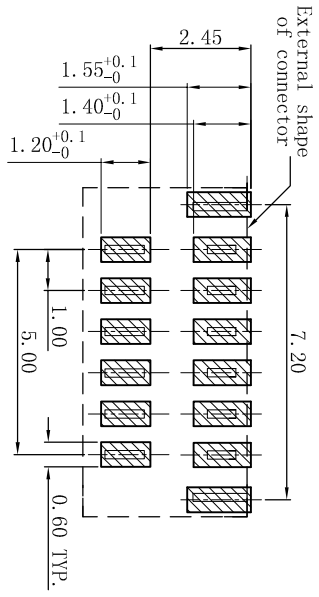
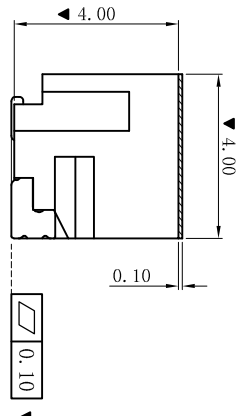
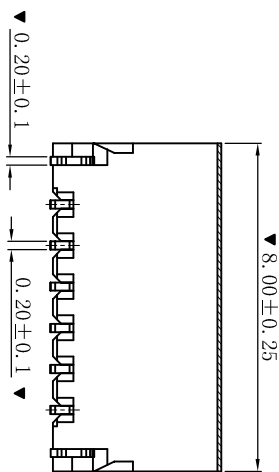


RoHS

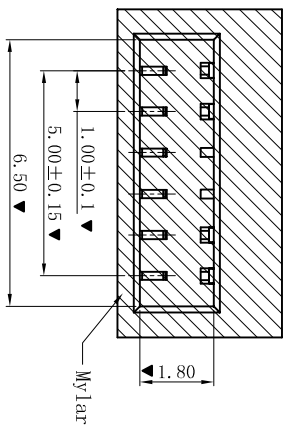

P.C.B LAYOUT: TOP VIEW
TOLERANCE: ±0.05mm



- SPECIFICATIONS**
- Voltage rating: 125V AC, DC
 - Current rating: 1A, AC, DC
 - Withstanding Voltage: 500V AC/minute
 - Insulation resistance: 100MΩ min
 - Temperature range: -25° C +85° C
 - Contact resistance: 20mΩ max
- WAFER**
- Part No.: W1002SV-2x06P-SS
 - Poles : 02-06P
 - Housing Material: PA6T U94V-0, Natural color
 - Pin Material: Phosphor Bronze
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

更新图面		2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .000±0.20	投影法 Projection		品名 (PART NAME)		1.00mm SMT 180° Wafer Connector Series	料号 (PART NO)	W1002SV-2x06P-SS	状态码 C
修订版本		2015-11-04	陈雄军	ANGLE: ±1°		第一角法 First Angle		东莞市祥运连接器有限公司 Dongguan XiangYun Connectors CO., Ltd						
变更图宽格式内容		2013-12-27	陈雄军	绘图/DR	陈雄军	单位 Unit	MM	比例/Scale		1:1	大小/Size		A4	说明 DESCRIPTION
新版本		2011-05-24	陈雄军	审核/CHECK	陈雄军	页码/SHEET	1/1	版本/Rev		D	日期/DATE		2019-06-03	
版次 REV.		1	2	日期/DATE		胡进		承认 APPRO.		日期/DATE		2011-05-24		承认 APPRO.