
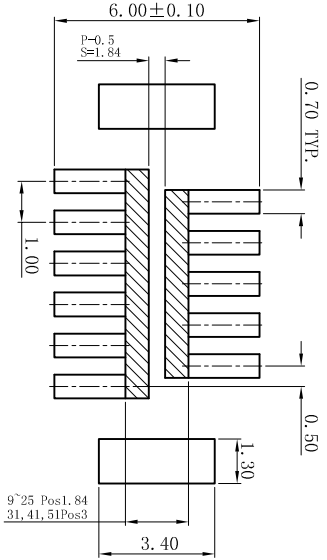
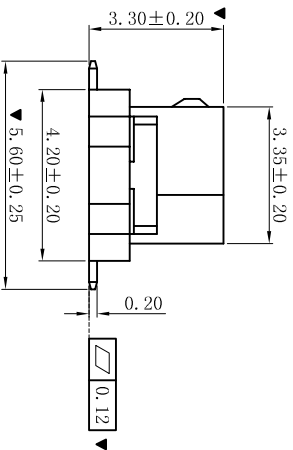
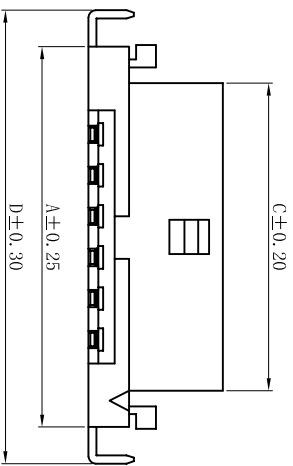


RoHS

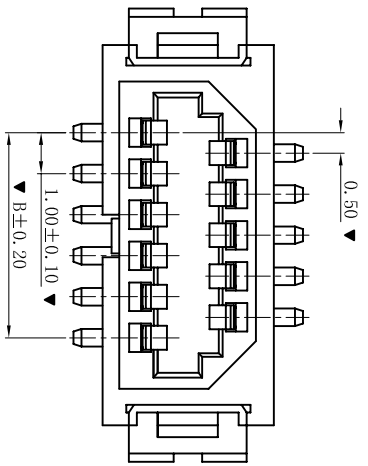

P.C.B LAYOUT: TOP VIEW  
TOLERANCE: ±0.05mm

- SPECIFICATIONS
- Voltage rating: 150V AC, DC
  - Current rating: 1A, AC, DC
  - Withstanding Voltage: 500V AC/minute
  - Insulation resistance: 500MΩ min
  - Temperature range: -25° C~+85° C
  - Contact resistance: 20mΩ max
- WAFER
- Part No.: W1002SV-2xNP
  - Poles : 09-51P
  - Housing Material: PA6T UL94V-0
  - Pin Material: Brass
  - Contact Area Plating: Tin-Plated
  - The Dimension Marked “▼” Must Be Recorded

PART NO.	Dimensions (mm)			
	A	B	C	D
09	8.30	4.00	6.55	10.10
11	9.30	5.00	7.55	11.10
13	10.30	6.00	8.55	12.10
15	11.30	7.00	9.55	13.10
17	12.30	8.00	10.55	14.10
19	13.30	9.00	11.55	15.10
21	14.30	10.00	12.55	16.10
23	15.30	11.00	13.55	17.10
25	16.30	12.00	14.55	18.10
31	19.30	15.00	17.55	21.10
41	24.30	20.00	22.55	26.10
51	29.30	25.00	27.55	31.10

D	更新图面	2019-06-03	陈雄军
C	修订版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军
H	版次 RRV.	说明 DESCRIPTION	日期 DATE
1	1	2	3
2	4	5	6
3	7	8	9
4	10		

一般公差	0±0.30
GENERAL TOLERANCE:	.0±0.25
	.00±0.20
	.000±0.05
ANGLE: ±1°	
绘图/DR	陈雄军
审核/CHECK	胡进
批准/APPRO	胡进
日期/DATE	2019-06-03

**XYDZ® 东莞市祥运连接器有限公司**  
Dongguan XiangYun Connectors CO., Ltd

投影法  
单位 Unit: MM  
比例/Scale: 1:1  
大小/Size: A4  
页码/Sheet: 1/1  
版本/Rev: D

品名 (PART NAME): DF9 1.00mm SMT 180° Wafer Connector Series  
料号 (PART NO): W1002SV-2xNP  
状态码: C