




RoHS

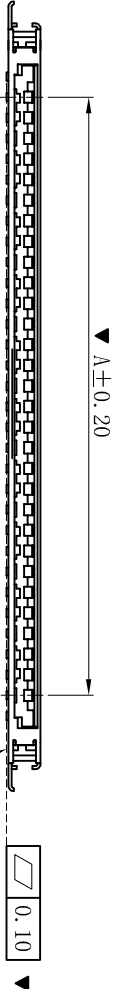

SOLDER AREA

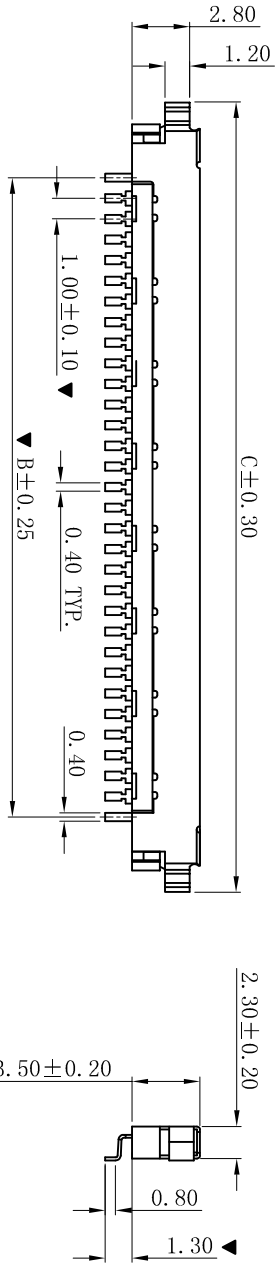

- SPECIFICATIONS**
- Voltage rating: 150V AC, DC
 - Current rating: 1A, AC, DC
 - Withstanding Voltage: 500V AC/minute
 - Insulation resistance: 100MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- WAFER**
- Part No. : W1006SR-NP
 - Poles : 20P 30P
 - Housing Material: Nylon 6T UL94V-0
 - Pin Material: Phosphor Bronze
 - Contact Area Plating: Gold-flash
 - The Dimension Marked “▼” Must Be Recorded

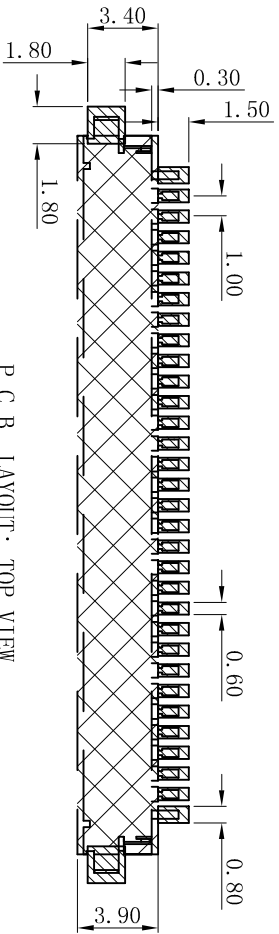

P. C. B LAYOUT: TOP VIEW
TOLERANCE: ±0.05mm

PART NO.	Dimensions (mm)		
	A	B	C
20	19.00	21.00	26.65
30	29.00	31.00	36.65

D	更新图面	2019-06-03	陈雄军	PR. Draw	一般公差 GENERAL TOLERANCE: ANGLE: ±1°	±0.30 .0±0.25 .00±0.20 .000±0.05
C	修订版本	2015-11-04	陈雄军	PR. Draw	绘图/DR	±0.30
B	变更图宽格式内容	2013-12-27	陈雄军	PR. Draw	审核/CHECK	±0.30
A	新版本	2011-05-24	陈雄军	PR. Draw	核准/APPRO	±0.30
H	说明	2011-05-24	陈雄军	PR. Draw	日期/DATE	±0.30
1	版次	2011-05-24	陈雄军	PR. Draw	日期/DATE	±0.30
1	REV.	2011-05-24	陈雄军	PR. Draw	日期/DATE	±0.30

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

投影法
Projection
单位 Unit
MM

品名
(PART NAME)
FI-X 1.00mm SWT 90° Wafer
Connector Series

料号
(PART NO)
W1006SR-NP

状态码
C