

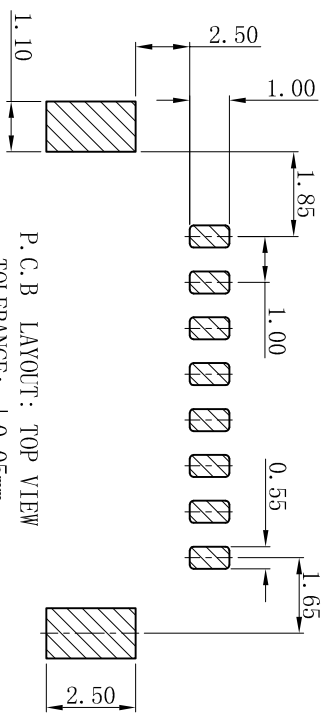

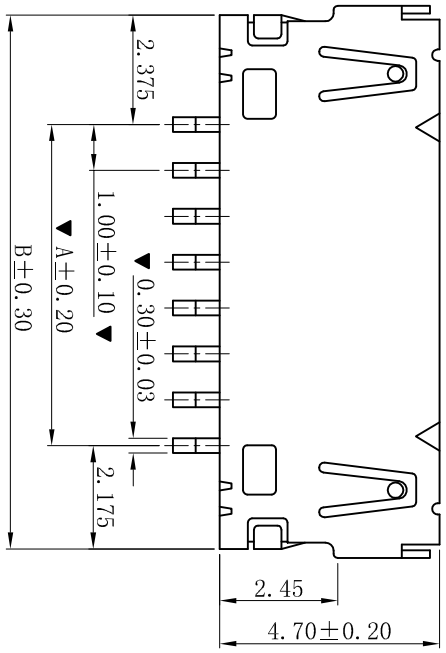


RoHS

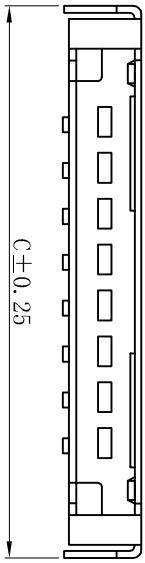

■ SPECIFICATIONS

- Voltage rating: 50V AC, DC
- Current rating: 1A, AC, DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 100MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No.: W1007SR-NP
- Poles : 08, 14, 20, 30P
- Housing Material: PA6T UL94V-0
- Pin Material: Phosphor Bronze
- Contact Area Plating: Gold-Flash
- The Dimension Marked “▼” Must Be Recorded

Part No	Dimensions (mm)		
	A	B	C
08	7.00	11.55	11.95
14	13.00	17.55	17.95
20	19.00	23.55	23.95
30	29.00	33.55	33.95

D	更新图面	2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE: ANGLE: ±1°	0±0.30 .0±0.25 .00±0.20 .000±0.05	绘图/DR 审核/CHECK 日期/DATE	陈雄军 胡进 2019-06-03
C	修订版本	2015-11-04	陈雄军	更改图宽格式内容		日期/DATE	2019-06-03
B	新版本	2013-12-27	陈雄军	说明		日期/DATE	2019-06-03
A	版次	2011-05-24	陈雄军	说明		日期/DATE	2019-06-03

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

投影法
单位 Unit: MM
比例/Scale: 1:1
大小/Size: A4
页码/Sheet: 1/1
版本/Rev: D

品名 (PART NAME): DF19 1.00mm SMT 90° Wafer Connector Series
料号 (PART NO): W1007SR-NP
状态码: C