
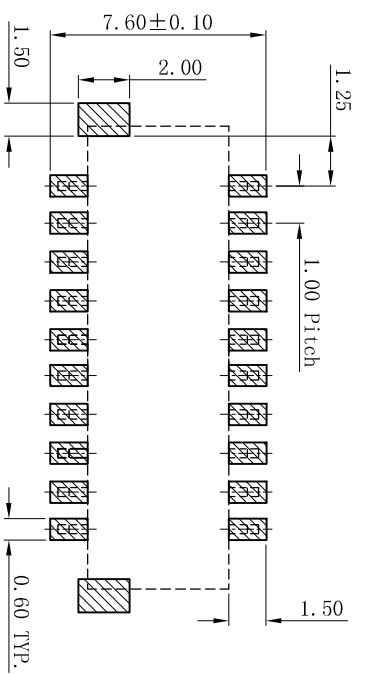

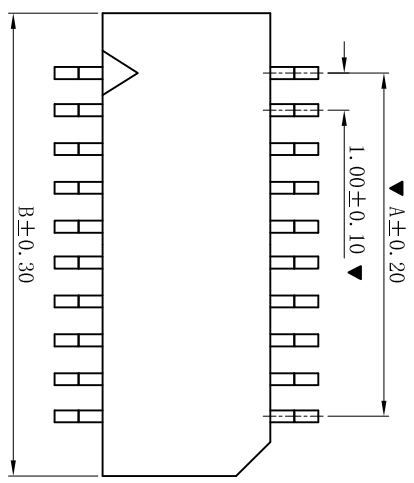


ROHS

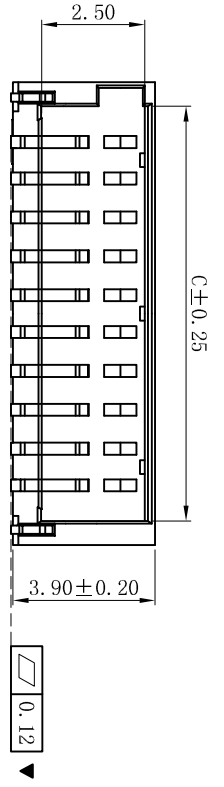

P. C. B LAYOUT: TOP VIEW
TOLERANCE: ±0.05mm

- SPECIFICATIONS**
- Voltage rating: 50V AC, DC
 - Current rating: 1A, AC, DC
 - Withstanding Voltage: 500V AC/minute
 - Insulation resistance: 100MΩ min
 - Temperature range: -25°C~+85°C
 - Contact resistance: 20mΩ max
- WAFER**
- Part No.: W1013SV-2xNP
 - Poles : 04-36P 50P
 - Housing Material: PA46 UL94V-0
 - Pin Material: Phosphor Bronze
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

PART NO.	Dimensions (mm)		
	A	B	C
2x02	1.00	4.60	3.20
2x03	2.00	5.60	4.20
2x04	3.00	6.60	5.20
2x05	4.00	7.60	6.20
2x06	5.00	8.60	7.20
2x07	6.00	9.60	8.20
2x08	7.00	10.60	9.20
2x09	8.00	11.60	10.20
2x10	9.00	12.60	11.20
2x11	10.00	13.60	12.20
2x12	11.00	14.60	13.20
2x13	12.00	15.60	14.20
2x14	13.00	16.60	15.20
2x15	14.00	17.60	16.20
2x16	15.00	18.60	17.20
2x17	16.00	19.60	18.20
2x18	17.00	20.60	19.20
2x25	24.00	27.60	26.20

D	更新图面	2019-06-03	陈雄军	更新图面
C	修订版本	2015-11-04	陈雄军	修订版本
B	变更图宽格式内容	2013-12-27	陈雄军	变更图宽格式内容
A	新版本	2011-05-24	陈雄军	新版本
H	版次	说明	日期	承认
1	REV.	DESCRIPTION	DATE	APPRO.

一般公差	0±0.30
GENERAL TOLERANCE:	.00±0.25
	.000±0.20
	ANGLE: ±1°
绘图/DR	陈雄军
审核/CHECK	陈雄军
核准/APPRO	胡进
日期/DATE	2019-06-03

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connector's CO., Ltd

投影法
单位 Unit: MM
比例/Scale: 1:1
大小/Size: A4
页码/SHEET: 1/1
版本/Rev: D

品名 (PART NAME): 88252 1.00mm SMT 180° Wafer Connector Series
料号 (PART NO): W1013SV-2xNP
状态码: C