

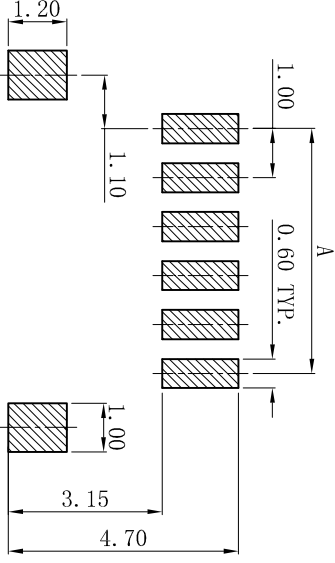
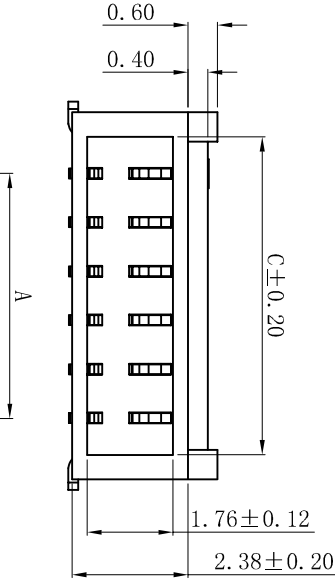
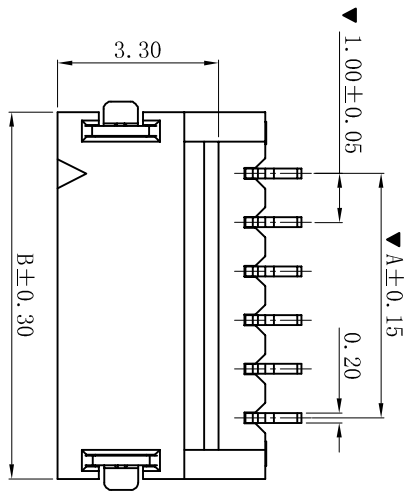


RoHS

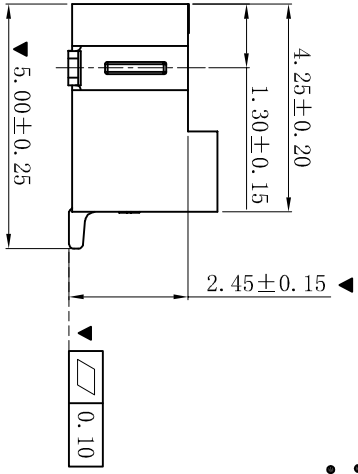

P.C.B LAYOUT: TOP VIEW  
TOLERANCE: ±0.05mm



- SPECIFICATIONS
- Voltage rating: 125V AC, DC
  - Current rating: 1A, AC, DC
  - Withstanding Voltage: 500V AC/minute
  - Insulation resistance: 100MΩ min
  - Temperature range: -25° C ~ +85° C
  - Contact resistance: 20mΩ max
- WAFER
- Part No.: W1014KSR-NP-B
  - Poles : 02-16P
  - Housing Material: PA9T UL94V-0
  - Pin Material: Brass
  - Contact Area Plating: Tin-Plated
  - The Dimension Marked “▲” Must Be Recorded

PART NO.	Dimensions (mm)		
	A	B	C
02	1.00	3.50	2.50
03	2.00	4.50	3.50
04	3.00	5.50	4.50
05	4.00	6.50	5.50
06	5.00	7.50	6.50
07	6.00	8.50	7.50
08	7.00	9.50	8.50
09	8.00	10.50	9.50
10	9.00	11.50	10.50
11	10.00	12.50	11.50
12	11.00	13.50	12.50
13	12.00	14.50	13.50
14	13.00	15.50	14.50
15	14.00	16.50	15.50
16	15.00	17.50	16.50

D	更新图面	2019-06-03	陈雄军	更新图面	2019-06-03	陈雄军	承认
C	修订版本	2015-11-04	陈雄军	变更图宽格式内容	2013-12-27	陈雄军	承认
B	新版本	2011-05-24	陈雄军	说明	2011-05-24	陈雄军	承认
A	版次	说明	说明	说明	说明	说明	说明
H	REV.	DESCRIPTION	DATE	APPRO.	DATE	APPRO.	DATE

XYDZ® 东莞市祥运连接器有限公司  
Dongguan XiangYun Connectors CO., Ltd

投影法 Projection	第一角投影	单位 Unit	MM
比例/Scale	1:1	大小/Size	A4
页码/Sheet	1/1	版本/Rev	D

品名 (PART NAME): NH1.00mm SMT 90° 带扣 Wafer Connector Series

料号 (PART NO): W1014KSR-NP-B

状态码: C