
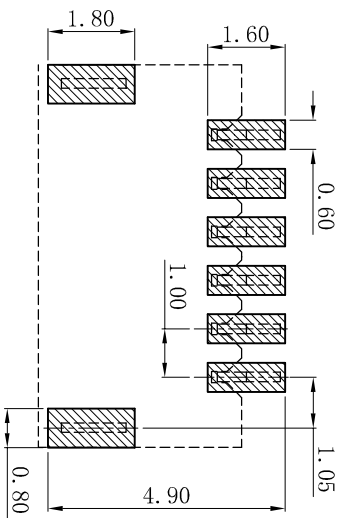
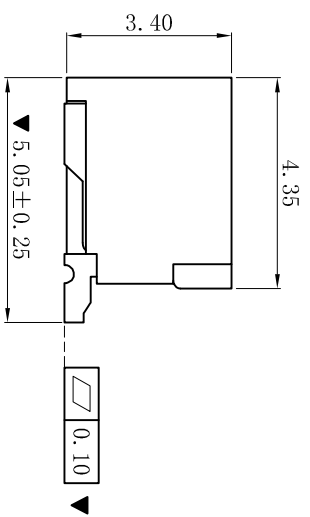
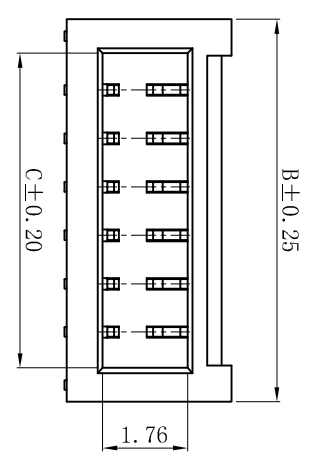
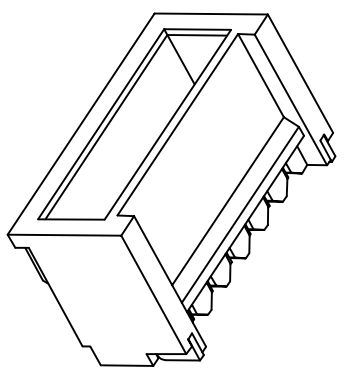


ROHS

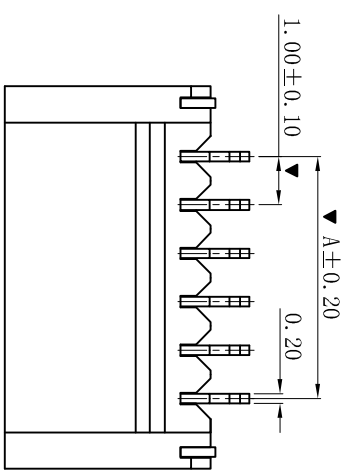

- SPECIFICATIONS
- Voltage rating: 125V AC, DC
  - Current rating: 1A, AC, DC
  - Withstanding Voltage: 500V AC/minute
  - Insulation resistance: 100MΩ min
  - Temperature range: -25°C~+85°C
  - Contact resistance: 20mΩ max
- WAFER
- Part No.: W1014SR-NP
  - Poles : 02-20P
  - Housing Material: PA9T UL94V-0
  - Pin Material: Phosphor Bronze
  - Contact Area Plating: Tin-Plated
  - The Dimension Marked “▼” Must Be Recorded

PART NO.	Dimensions (mm)		
	A	B	C
02	1.00	3.90	2.50
03	2.00	4.90	3.50
04	3.00	5.90	4.50
05	4.00	6.90	5.50
06	5.00	7.90	6.50
07	6.00	8.90	7.50
08	7.00	9.90	8.50
09	8.00	10.90	9.50
10	9.00	11.90	10.50
11	10.00	12.90	11.50
12	11.00	13.90	12.50
13	12.00	14.90	13.50
14	13.00	15.90	14.50
15	14.00	16.90	15.50
16	15.00	17.90	16.50
17	16.00	18.90	17.50
18	17.00	19.90	18.50
19	18.00	20.90	19.50
20	19.00	21.90	20.50

更新图画		2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE: 0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE: ±1°		投影法 Projection 单位 Unit MM		品名 (PART NAME) NH1.00mm SMT 90° Wafer Connector Series		料号 (PART NO) W1014SR-NP		状态码 C
修訂版本		2015-11-04	陈雄军	绘图/DR 陈雄军		审核/CHECK 陈雄军		大小/SIZE A4		页码/SHEET 1/1		
变更图宽格式内容		2013-12-27	陈雄军	日期/DATE 2019-06-03		日期/DATE 2011-05-24		日期/DATE 2019-06-03		日期/DATE 2019-06-03		
新版本		2011-05-24	陈雄军	说明 DESCRIPTION		说明 DESCRIPTION		说明 DESCRIPTION		说明 DESCRIPTION		
版次 REV.		1		日期/DATE		日期/DATE		日期/DATE		日期/DATE		

**XYDZ® 东莞市祥运连接器有限公司**  
Dongguan XiangYun Connectors CO., Ltd