
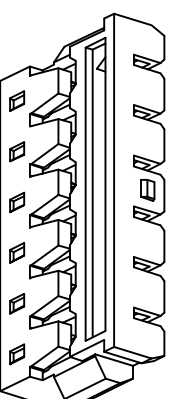
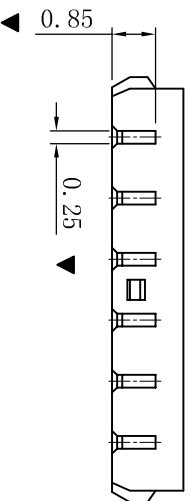

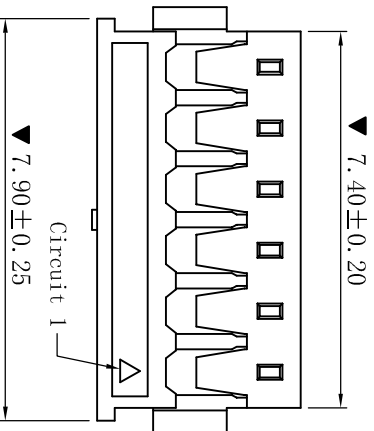


RoHS

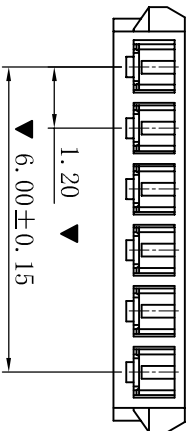

■ SPECIFICATIONS

- Voltage rating: 50V AC / DC
- Current rating: 2A AC / DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 100M Ω min
- Temperature range: -25 $^{\circ}$ C~+85 $^{\circ}$ C
- Contact resistance: 20m Ω max

■ HOUSING

- Part No.: H1201-06P-S
- Poles: 06P
- Material: LCP UL94-V0, Black Color
- The Dimension Marked "▼" Must Be Recorded

D	更新图面	2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05	投影法 Projection	品名 (PART NAME)	1.20mm Crimp Style Connector Series	状态码
C	修订版本	2015-11-04	陈雄军	绘图/DR	ANGLE: ±1 $^{\circ}$	单位 Unit			
B	变更图宽格式内容	2013-12-27	陈雄军	审核/CHECK		比例/Scale			
A	新版本	2011-05-24	陈雄军	核准/APPRO	MR. feng	大小/SIZE			
H	说明	日期	承认	日期/DATE	2015-11-04	页码/SHEET			
1	版次 REV.	DESCRIPTION				版本/Rev			

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

Connectors

料号
(PART NO)

H1201-06P-S

C