

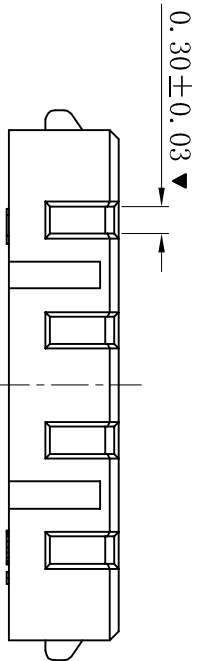


ROHS

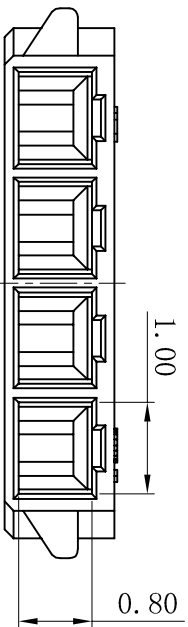

1.20 ± 0.10

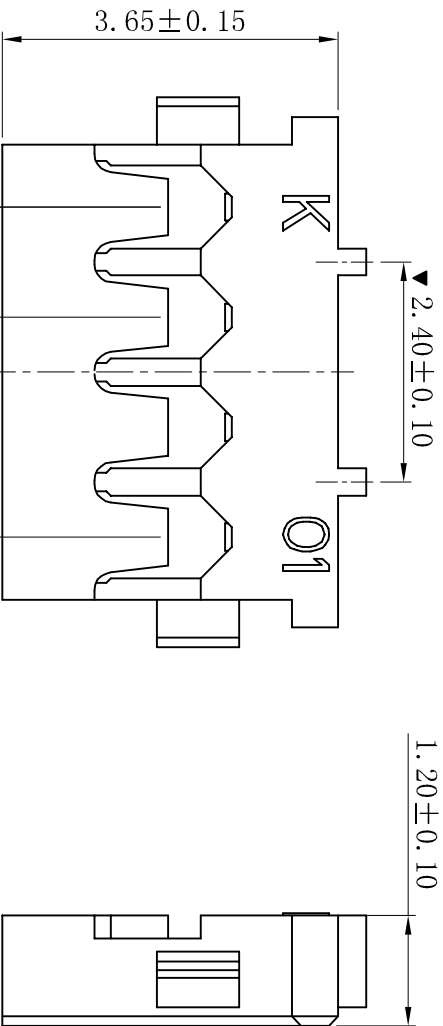

■ SPECIFICATIONS

- Voltage rating: 50V AC, DC
- Current rating: 1.5A, AC, DC
- Withstanding Voltage: 100V AC/minute
- Insulation resistance: 500MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ HOUSING

- Part No. : H1201-NP-K
- Poles : 02-08P
- Housing Material : PA46 UL94V-0 Black
- The Dimension Marked “▼” Must Be Recorded

PART NO.	Dimensions (mm)	
	A	B
02	1.20	2.60
03	2.40	3.80
04	3.60	5.00
05	4.80	6.20
06	6.00	7.40
07	7.20	8.60
08	8.40	9.80

D	更新图面	2019-06-03	陈雄军
C	修订版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军
H	说明	日期	承认
1	版次	DESCRIPTION	APPRO.

一般公差		0±0.30
GENERAL TOLERANCE:		.0±0.25
		.000±0.20
		.000±0.05
ANGLE: ±1°		
绘图/DR	陈雄军	
审核/CHECK	胡进	
核准/APPRO	MR. feng	
日期/DATE	2016-12-05	

<p>XYDZ® 东莞市祥运连接器有限公司 Dongguan XiangYun Connectors CO., Ltd</p>	
投影法	第一角法
单位 Unit	MM
比例/Scale	1:1
大小/SIZE	A4
页码/SHEET	1/1
版本/Rev	D
品名	1.20mm Housing Connector Series
料号	H1201-NP-K
(PART NO)	
状态码	C