
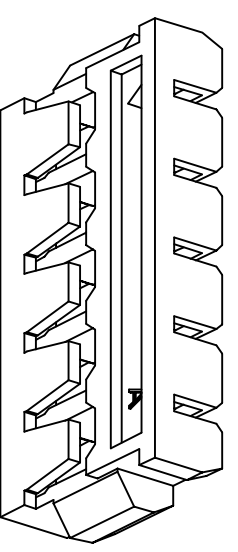
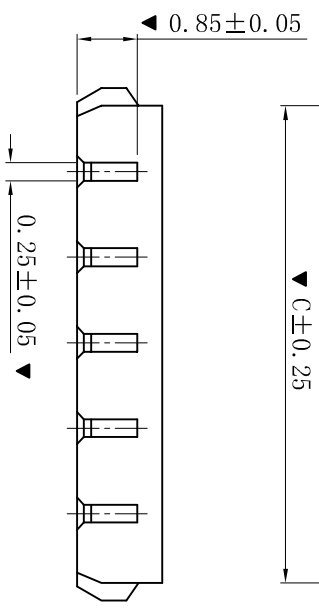

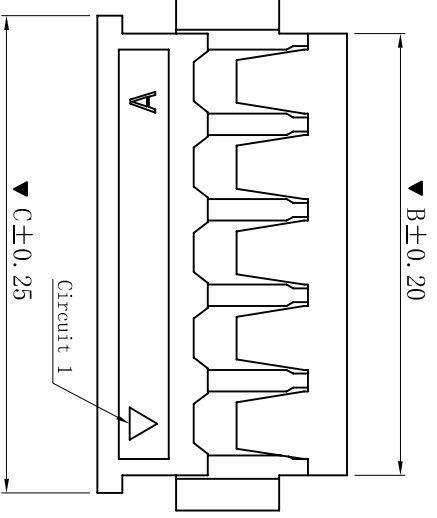


RoHS

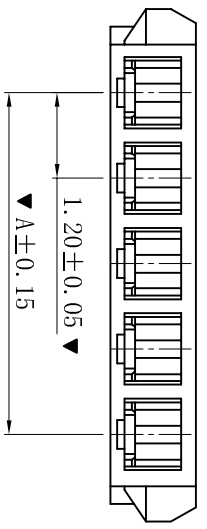

- SPECIFICATIONS
- Voltage rating: 50V AC, DC
 - Current rating: 2.0A, AC, DC
 - Withstanding Voltage: 500V AC/minute
 - Insulation resistance: 100MΩ min
 - Temperature range: -25° C~+85° C

- HOUSING
- Part No.: H1201-NP-S
 - Poles : 02-08P
 - Housing Material: PA46 & LCP UL94V-0 Black
 - The Dimension Marked “▼” Must Be Recorded

Poles	Dimensions (mm)		
	A	B	C
02	1.20	2.60	3.10
03	2.40	3.80	4.30
04	3.60	5.00	5.50
05	4.80	6.20	6.70

D	更新图面	2019-06-03	陈雄军
C	修订版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军
1	版次 RRV.	说明 DESCRIPTION	日期 DATE.

一般公差		0±0.30
GENERAL TOLERANCE:		.0±0.25
		.00±0.20
		.000±0.05
ANGLE: ±1°		
绘图/DR	陈雄军	
审核/CHECK	胡进	
核准/APPRO	MR. feng	
日期/DATE	2016-12-05	

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connector's CO., Ltd

投影法: 单位: MM
比例/Scale: 1:1
大小/Size: A4
页码/Sheet: 1/1
版本/Rev: D

品名 (PART NAME): 1.20mm Housing Connector Series
料号 (PART NO): H1201-NP-S
状态码: C