



RoHS

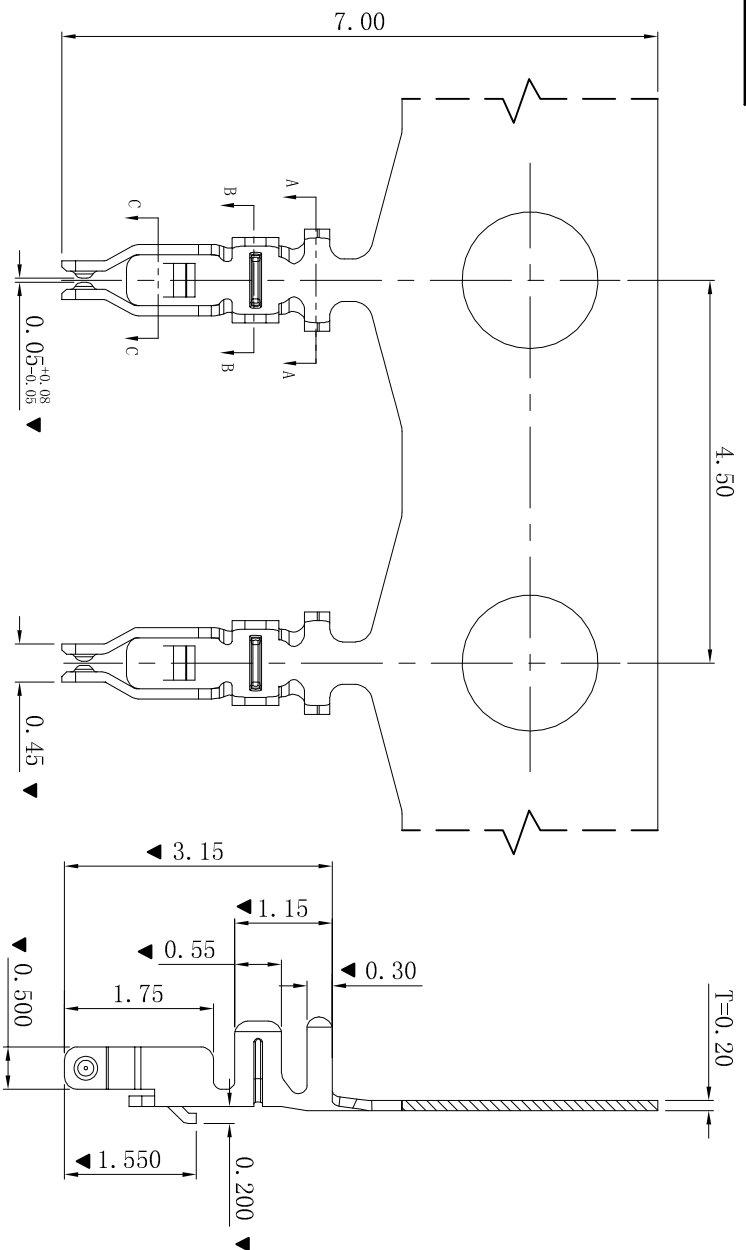

- SPECIFICATIONS
 - Voltage rating: 50V AC, DC
 - Current rating: 2A, AC, DC
 - Withstanding Voltage: 500V AC/minute
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- TERMINAL
 - Part No.: T1201PG-S
 - Applicable wire: AWG#28-#30
 - Material: Phosphor Bronze
 - Finish: Gold-Flash
 - The Dimension Marked “▼” Must Be Recorded

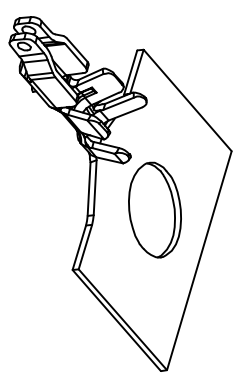

SECTION: A-A

SECTION: B-B

SECTION: C-C

更新图面		2019-06-03		陈雄军		一般公差 GENERAL TOLERANCE: ±0.30 .0±0.25 .00±0.20 ANGLE: ±1°		投影法 Projection 单位 Unit MM		品名 (PART NAME) 1.20mm Terminal Connector Series		料号 (PART NO) T1201PG-S		状态码 C	
修订版本		2015-11-04		陈雄军		±0.30 .0±0.25 .00±0.20 ANGLE: ±1°		审核/CHECK 陈雄军		大小/SIZE A4					
变更图宽格式内容		2013-12-27		陈雄军				核准/APPRO 胡进		页码/SHEET 1/1					
新版本		2011-05-24		陈雄军				日期/DATE 2016-12-05		版本/Rev D					
说明		日期		承认											
DESCRPTION		DATE		APPRO											
版次		1		1											
REV.		2		2											
		3		3											
		4		4											
		5		5											
		6		6											
		7		7											
		8		8											
		9		9											
		10		10											

XYDZ® 东莞市祥运连接器有限公司
 Dongguan XiangYun Connectors CO., Ltd