

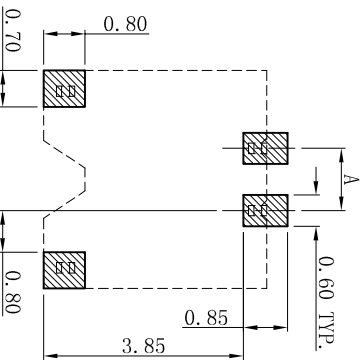
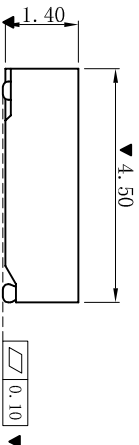



ROHS

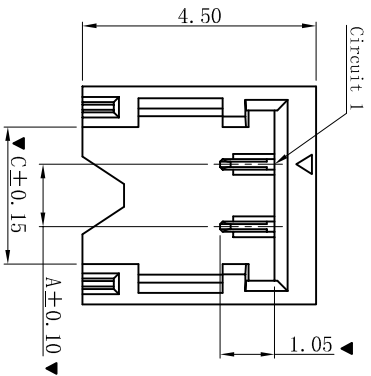

P.C.B LAYOUT: TOP VIEW
TOLERANCE: ±0.05mm

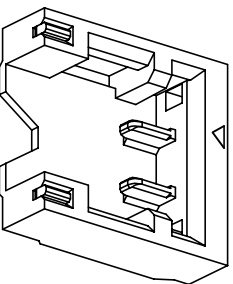

3D VIEW

■ SPECIFICATIONS

- Voltage rating: 50V AC, DC
- Current rating: 2.0A, AC, DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 100MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No. : W1201SR-NP-B-4TXX-S
- Poles : 02-03P
- Housing Material: PA4T UL94V-0 Black/自然色
- Pin Material: Phosphor Bronze
- Fitting Nail: Brass
- Contact Area Plating: Gold-Flash
- Fitting Nail: Matte Tin-plated
- The Dimension Marked “▼” Must Be Recorded

W1201SR-NP-B-4T XX-S

BK: (None:Black)

ZR: (Natural)

Poles	Dimensions (mm)		
	A	B	C
02	1.20	4.20	2.64
03	2.40	5.40	3.84

XYDZ® 东莞市祥运连接器有限公司
Dongguan Xiangyun Connectors CO., Ltd

Connectors

1.20mm SMT Wafer Connector Series

D	更新图面	2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE: ANGLE: ±1°	0±0.30 .0±0.25 .00±0.20 .000±0.05
C	修订版本	2015-11-04	陈雄军	绘图/DR	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军	审核/CHECK	胡进
A	新版本	2011-05-24	陈雄军	批准/APPRO	胡进
H	版次 REV.	说明 DESCRIPTION	日期 DATE	承认 APPRO.	日期/DATE

投影法	第一角	品名	1.20mm SMT Wafer Connector Series	料号	W1201SR-NP-B-4TXX-S	状态码	C
单位 Unit	MM	(PART NAME)		(PART NO)			
比例/Scale	1:1						
大小/Size	A4						
页码/Sheet	1/1						
版本/Rev	D						