

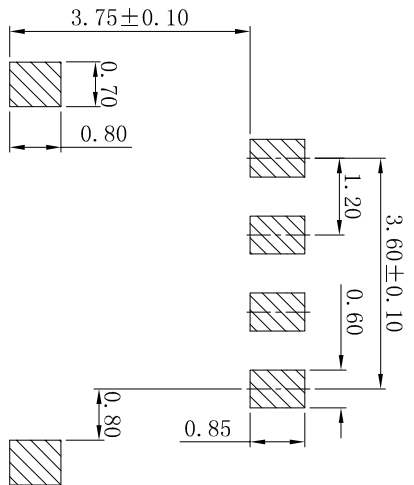
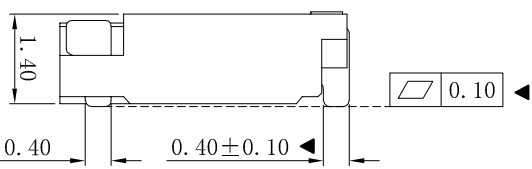
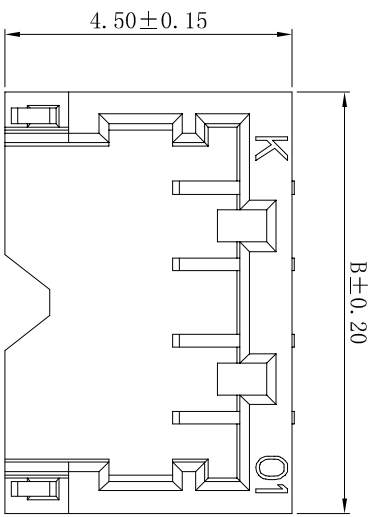


RoHS

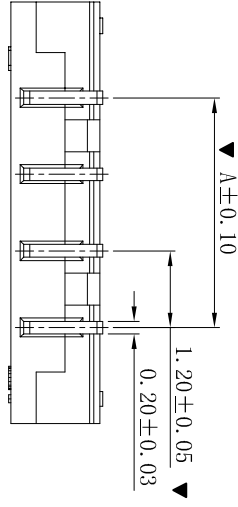

P.C.B LAYOUT: TOP VIEW
TOLERANCE: ±0.05mm

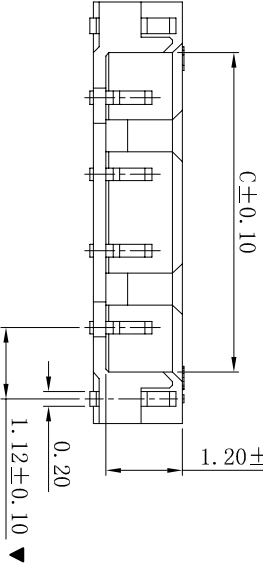

- SPECIFICATIONS
- Voltage rating: 50V AC, DC
 - Current rating: 1.5A, AC, DC
 - Withstanding Voltage: 500V AC/minute
 - Insulation resistance: 100MΩ min
 - Temperature range: -25° C⁺+85° C
 - Contact resistance: 20mΩ max
- WAFER
- Part No. : W1201SR-NP-K
 - Poles : 02-08P
 - Housing Material: PA9T UL94V-0 Black
 - Pin Material: Phosphor Bronze
 - Fitting Nail: Brass
 - Contact Area Plating: Gold-Flash
 - Fitting Nail: Tin-plated
- The Dimension Marked “▼” Must Be Recorded

PART NO	Dimensions (mm)		
	A	B	C
02	1.20	4.30	2.64
03	2.40	5.50	3.84
04	3.60	6.70	5.04
05	4.80	7.90	6.24
06	6.00	9.10	7.44
07	7.20	10.30	8.64
08	8.40	11.50	9.84

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .000±0.20 ANGLE: ±1°
绘图/DR	陈雄军
审核/CHECK	陈雄军
批准/APPRO	胡进
日期/DATE	2019-06-03

更新图面	2019-06-03	陈雄军
修订版本	2015-11-04	陈雄军
变更图宽格式内容	2013-12-27	陈雄军
新版本	2011-05-24	陈雄军
说明		承认

版次 REV.	1	2	3	4	5	6	7	8	9	10
DESCRIPTION										
DATE										
APPRO.										

投影法 Projection	MM	品名 (PART NAME)	1.20mm SMT Wafer Connector Series
单位 Unit	MM	料号 (PART NO)	W1201SR-NP-K
比例/Scale	1:1	状态码	C
大小/SIZE	A4		
页码/SHEET	1/1		
版本/Rev	D		