



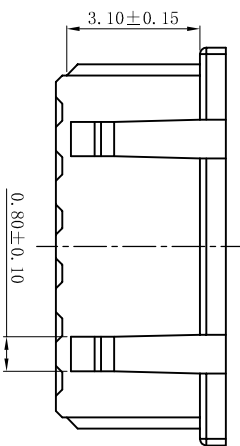




RoHS



- SPECIFICATIONS
- Voltage rating: 125V AC, DC
 - Current rating: 1A, AC, DC
 - Withstanding Voltage: 250V AC/minute
 - Insulation resistance: 100MΩ min
 - Temperature range: -25° C~+85° C
- HOUSING
- Part No.: H1250-NP
 - Poles: 02-15P
 - Housing Material: PA66 UL94V-0
 - The Dimension Marked “▼” Must Be Recorded

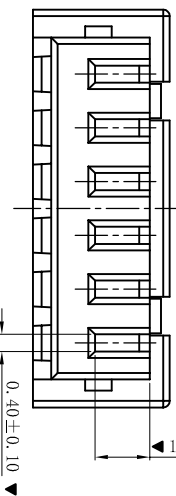

SECTION: A-A

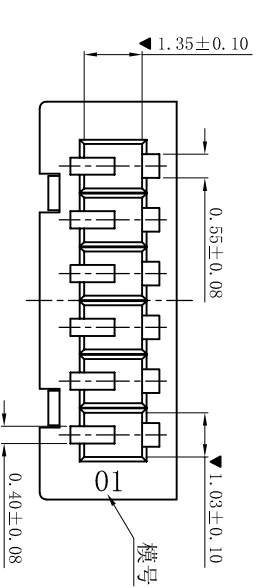

Poles	Dimensions (mm)	
	A	B
02	3.00	1.25
03	4.25	2.50
04	5.50	3.75
05	6.75	5.00
06	8.00	6.25
07	9.25	7.50
08	10.50	8.75
09	11.75	10.00
10	13.00	11.25
11	14.25	12.50
12	15.50	13.75
13	16.75	15.00
14	18.00	16.25
15	19.25	17.50

XYDZ® 东莞市祥运连接器有限公司
Dongguan Xiangyun Connector s CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05
ANGLE: ±1°	

绘图/DR	陈雄军
审核/CHECK	陈雄军
批准/APPRO	胡进

日期/DATE	2019-06-03
---------	------------

投影法 Projection	第一角
单位 Unit	MM
比例/Scale	1:1
大小/Size	A4
页码/Sheet	1/1
版本/Rev	D

品名 (PART NAME)	Molex 1.25mm Male Housing
料号 (PART NO)	H1250-NP
状态码	C

更新图面

修订版本

变更图宽格式内容

新版本

说明
DESCRIPTION

版次 REV.	说明 DESCRIPTION	日期 DATE	承认 APPRO.
1			
2			
3			
4			
5			
6			
7			
8			
9			
10			