
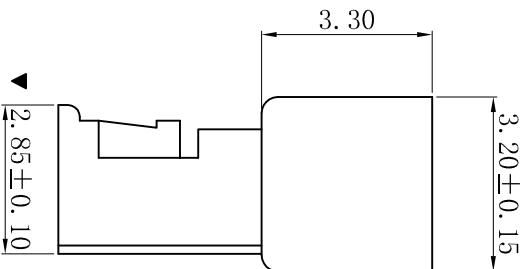
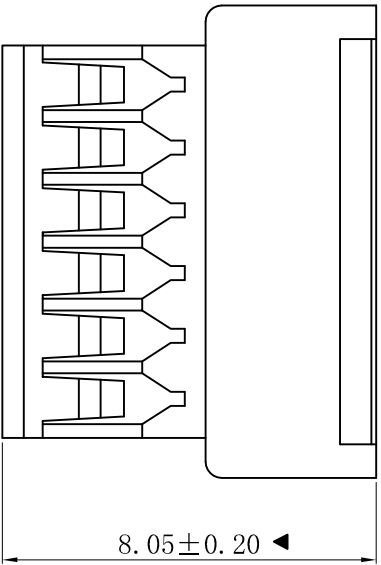


RoHS

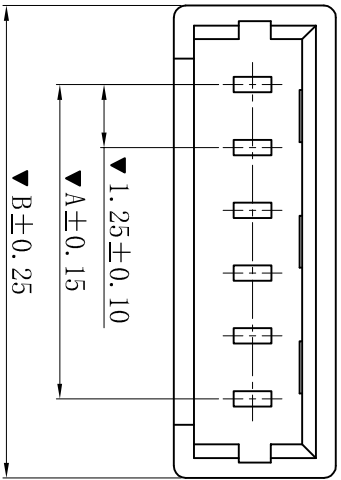

■ SPECIFICATIONS

- Voltage rating: 125V AC, DC
- Current rating: 1A, AC, DC
- Withstanding Voltage: 250V AC/minute
- Insulation resistance: 100MΩ min
- Temperature range: -25° C +85° C

■ HOUSING

- Part No.: HI251-NP
- Poles: 02-15P
- Housing Material: PA66 UL94V-0
- The Dimension Marked “▼” Must Be Recorded

Poles	Dimensions (mm)	
	A	B
02	1.25	4.25
03	2.50	5.50
04	3.75	6.75
05	5.00	8.00
06	6.25	9.25
07	7.50	10.50
08	8.75	11.75
09	10.00	13.00
10	11.25	14.25
11	12.50	15.50
12	13.75	16.75
13	15.00	18.00
14	16.25	19.25
15	17.50	20.50

E	更新图面	2019-06-03	PA66
D	依据实物修订尺寸	2017.09.22	Jeff
C	修订版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军
H	说明	日期	承认
1	版次	DESCRIPTION	APPRO.
1	1	2	3
2	2	3	4
3	3	4	5
4	4	5	6
5	5	6	7
6	6	7	8
7	7	8	9
8	8	9	10

一般公差	0±0.30
GENERAL TOLERANCE:	.0±0.25
	.00±0.20
	.000±0.05
ANGLE:	±1°

投影法	Projection	第一角
单位	Unit	MM
比例/Scale	Scale	1:1
大小/Size	Size	A4
页码/Sheet	Sheet	1/1
版本/Rev	Rev	E

XYDZ® 东莞市祥运连接器有限公司  
Dongguan XiangYun Connector s CO., Ltd

品名 (PART NAME) Molex 1.25mm Female Housing  
料号 (PART NO) HI251-NP

1	1	2	3	4	5	6	7	8	9	10
1	2	3	4	5	6	7	8	9	10	