


RoHS

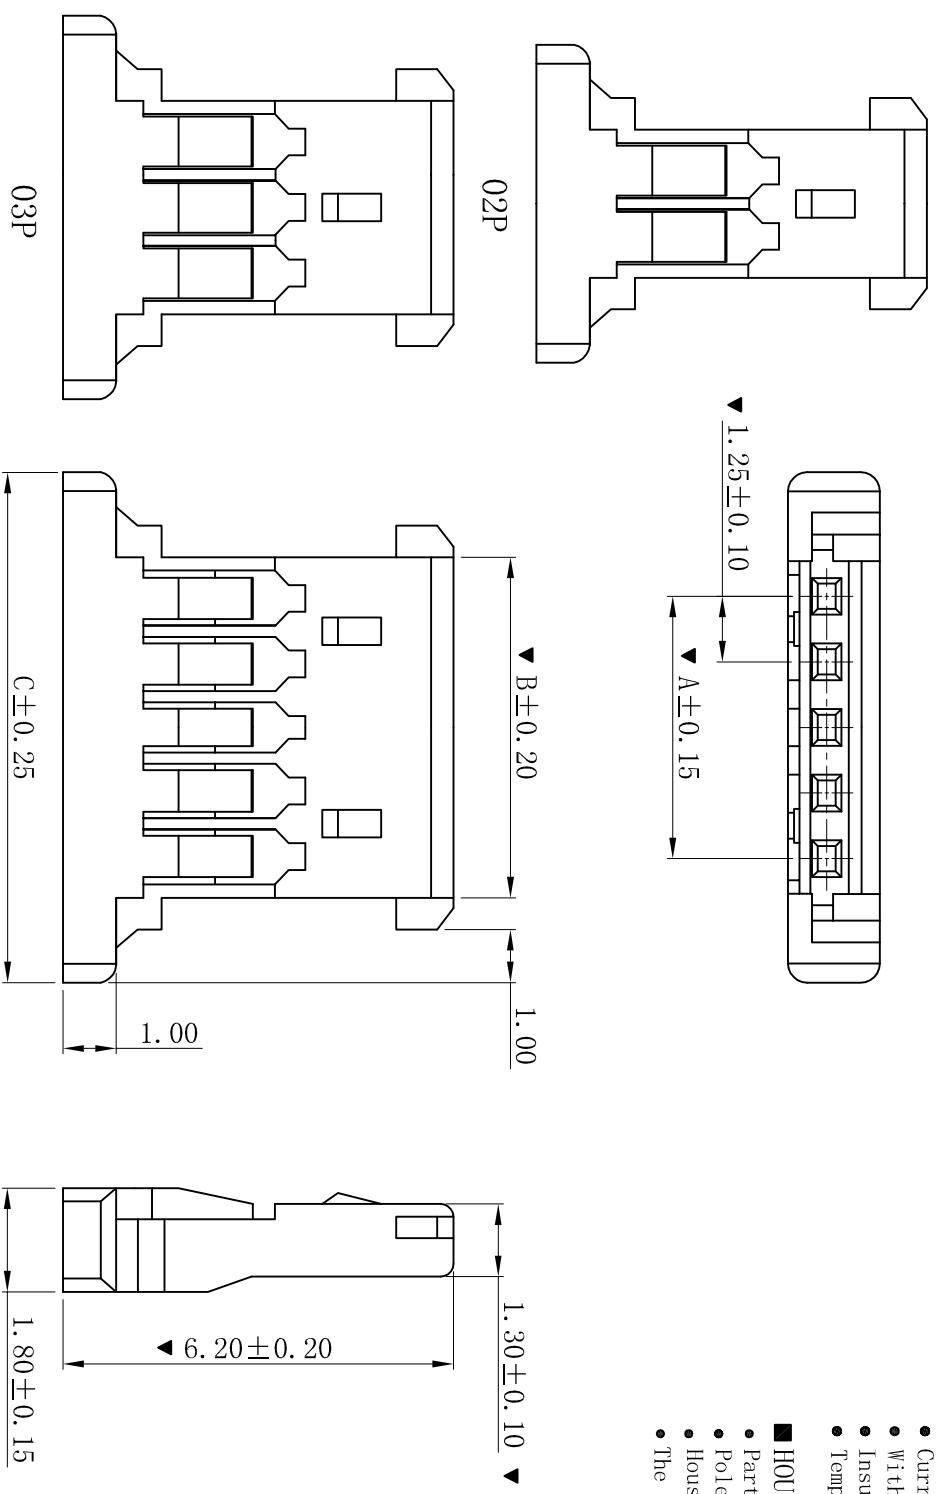

■ SPECIFICATIONS

- Voltage rating: 125V AC, DC
- Current rating: 1.0A, AC, DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 100MΩ min
- Temperature range: -25°C~+85°C

■ HOUSING

- Part No.: HI254-NP
- Poles : 02-15P & 20P 30P
- Housing Material: PA66 UL94V-0
- The Dimension Marked “▼” Must Be Recorded

Poles	Dimensions (mm)		
	A	B	C
02	1.25	2.72	5.72
03	2.50	3.97	6.97
04	3.75	5.22	8.22
05	5.00	6.47	9.47
06	6.25	7.72	10.72
07	7.50	8.97	11.97
08	8.75	10.22	13.22
09	10.00	11.47	14.47
10	11.25	12.72	15.72
11	12.50	13.97	16.97
12	13.75	15.22	18.22
14	16.25	17.72	20.72
15	17.50	18.97	21.97
20	23.75	25.22	28.22
30	36.25	37.72	40.72

更新图面		2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE: 0±0.30 .00±0.25 .000±0.05		投影法 Projection MM		品名 (PART NAME) 51146 1.25mm Housing Connector Series	
修訂版本		2015-11-04	陈雄军	ANGLE: ±1°		单位 Unit		料号 (PART NO) HI254-NP	
变更图宽格式内容		2013-12-27	陈雄军	审核/CHKC		比例/Scale		状态码	
新版本		2011-05-24	陈雄军	核准/APPRO		大小/Size		C	
说明		日期	承认	日期/DATE		页码/SHEET			
DESCRPTION		DATE	APPRO.	2019-06-03		版本/Rev			
1		2	3	4		5		6	
7		8		9		10			

**XYDZ® 东莞市祥运连接器有限公司**  
Dongguan XiangYun Connectors CO., Ltd