
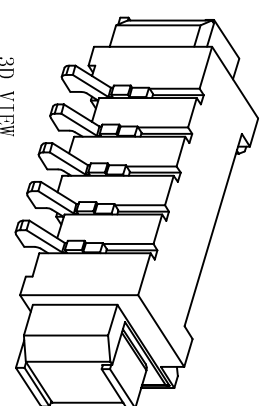
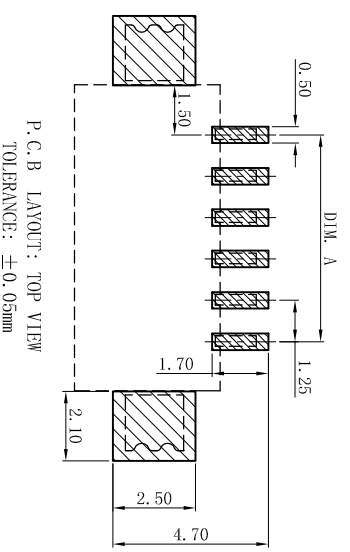


- SPECIFICATIONS**
- Voltage Rating: 125V AC, DC
  - Current Rating: 1.0A, AC, DC
  - Withstanding Voltage: 500V AC/minute
  - Insulation Resistance: 100MΩ min
  - Temperature range: -25° C~+85° C
  - Contact resistance: 20mΩ max
- WAFER**
- Part No.: W1251SR-NP-JK
  - Poles : 02-16P
  - Material: LCP UL94V-0, Beige
  - Pin Material: Phosphor Bronze/Tin-Plated
  - Solder Tab Material: Brass/Tin-plated
  - The Dimension Marked "▲" Must Be Recorded

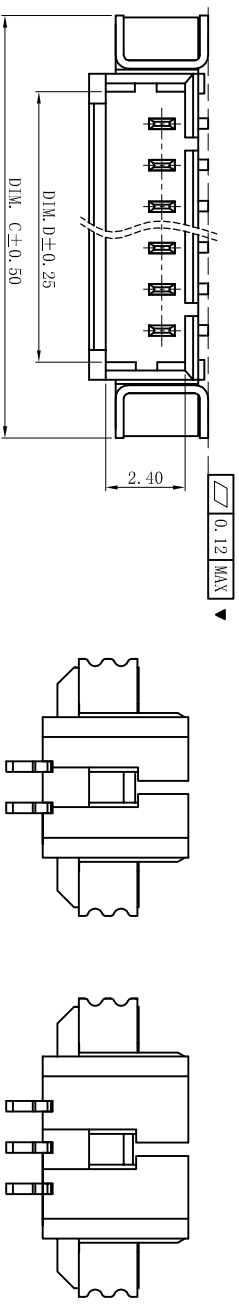

Poles	Dimensions (mm)			
	A	B	C	D
02	1.25	4.25	7.75	3.20
03	2.50	5.50	9.00	4.45
04	3.75	6.75	10.25	5.70
05	5.00	8.00	11.50	6.95
06	6.25	9.25	12.75	8.20
07	7.50	10.50	14.00	9.45
08	8.75	11.75	15.25	10.70
09	10.00	13.00	16.50	11.95
10	11.25	14.25	17.75	13.20
11	12.50	15.50	19.00	14.45
12	13.75	16.75	20.25	15.70
13	15.00	18.00	21.50	16.95
14	16.25	19.25	22.75	18.20
15	17.50	20.50	24.00	19.45
16	18.75	21.75	25.25	20.70

**XYDZ® 东莞市祥运连接器有限公司**  
Dongguan Xiangyun Connector s CO., Ltd

一般公差  
GENERAL TOLERANCE:  
±0.30  
.00 ± 0.25  
.000 ± 0.05  
ANGLE: ±1°

投影法  
Projection  
单位 Unit  
MM  
比例/Scale  
1:1  
大小/Size  
A4  
页码/SHEET  
1/1  
版本/Rev  
B

品名  
(PART NAME)  
Molex 1.25mm SMT 90° Wafer  
Connector Series

绘图/DR  
审核/CHECK  
批准/APPRO  
日期/DATE  
2019-06-03  
陈雄军  
胡进  
2019-06-03

更新图面  
新版本  
2018-11-29  
PP: Duuu  
PP: Duuu  
承认  
APPRO.

说明  
DESCRIPTION  
版次  
REV.

1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----