
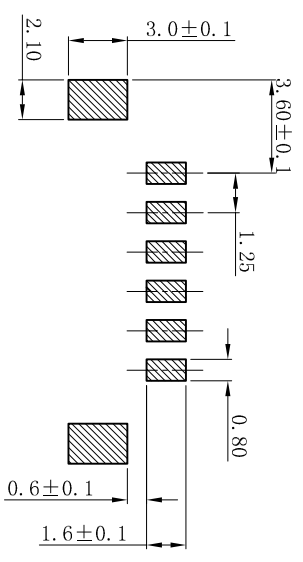
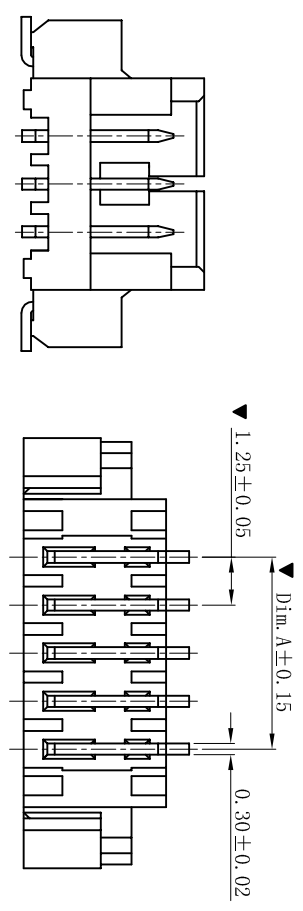
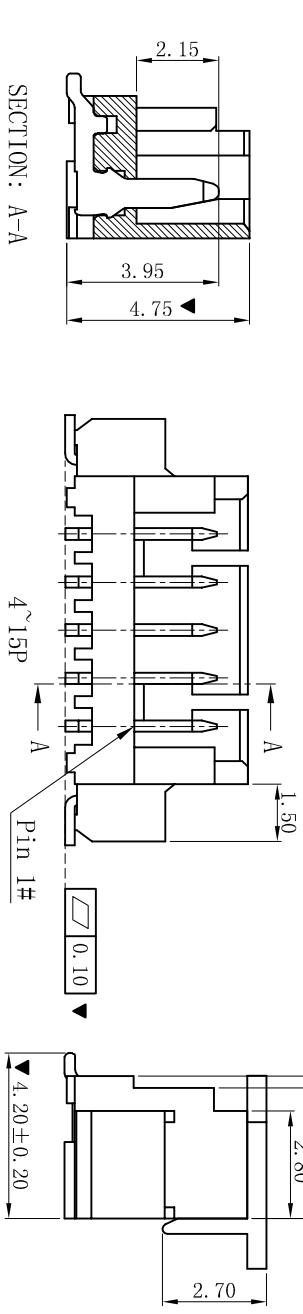


ROHS

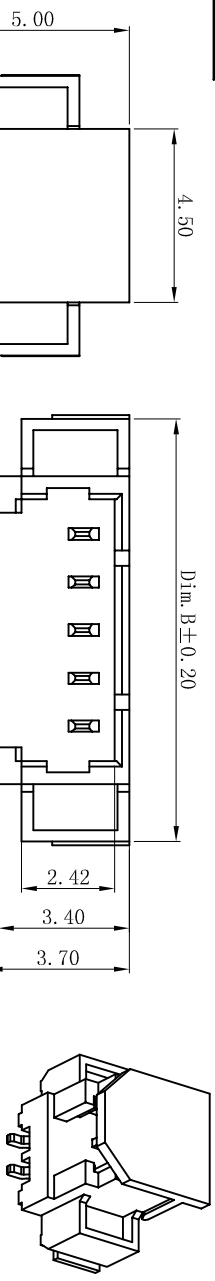

P.C.B LAYOUT: TOP VIEW
TOLERANCE: ±0.05mm

- SPECIFICATIONS
- Voltage Rating: 125V AC, DC
 - Current Rating: 1.0A, AC, DC
 - Withstanding Voltage: 250V AC/minute
 - Insulation Resistance: 100MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max

- WAFER
- Part No.: W1251SV-NP-CAP
 - Poles : 02-15P
 - Material: PA46 UL94V-0
 - Pin Material: Phosphor Bronze /Tin-plated
 - Solder Tab Material: Brass /Tin-plated
 - The Dimension Marked "▼" Must Be Recorded

Poles	Dimensions (mm)		
	A	B	C
02	1.25	7.25	4.25
03	2.50	8.50	5.50
04	3.75	9.75	6.75
05	5.00	11.00	8.00
06	6.25	12.25	9.25
07	7.50	13.50	10.50
08	8.75	14.75	11.75
09	10.00	16.00	13.00
10	11.25	17.25	14.25
11	12.50	18.50	15.50
12	13.75	19.75	16.75
13	15.00	21.00	18.00
14	16.25	22.25	19.25
15	17.50	23.50	20.50

XYDZ® 东莞市祥运连接器有限公司
Dongguan Xiangyun Connector s CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .000±0.05	绘图/DR	陈雄军
ANGLE: ±1°		审核/CHECK	胡进
		日期/DATE	2019-06-03

投影法 Projection	第一角	品名 (PART NAME)	Molex 1.25mm SMT 180° Wafer
单位 Unit	MM	料号 (PART NO)	W1251SV-NP-CAP
比例/Scale	1:1	状态码	C
大小/Size	A4		
页码/SHEET	1/1		
版本/Rev	D		

更新图面	2019-06-03	陈雄军	更新图面
修订版本	2015-11-04	陈雄军	修订版本
变更图宽格式内容	2013-12-27	陈雄军	变更图宽格式内容
新版本	2011-05-24	陈雄军	新版本
说明		承认	说明
版次		APPRO.	版次
REV.			REV.

1 2 3 4 5 6 7 8 9 10