


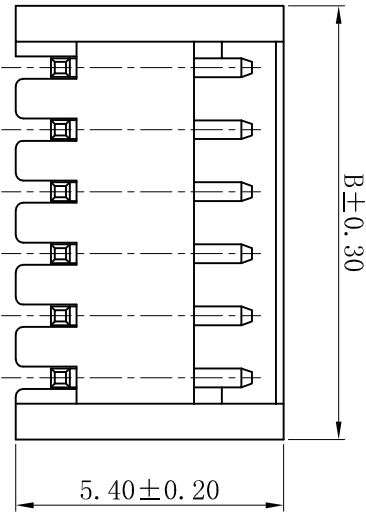


RoHS

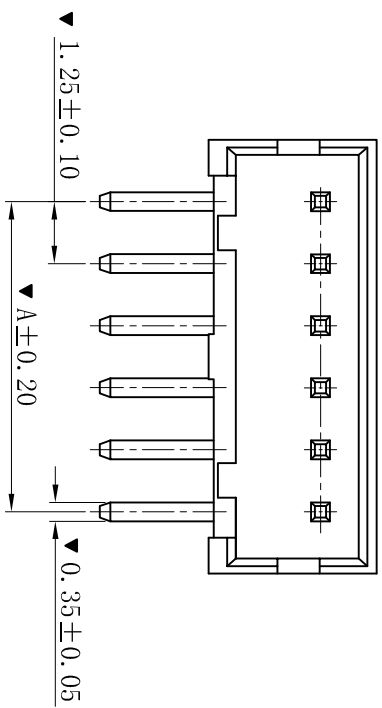

P.C.B LAYOUT: TOP VIEW
TOLERANCE: ±0.05mm

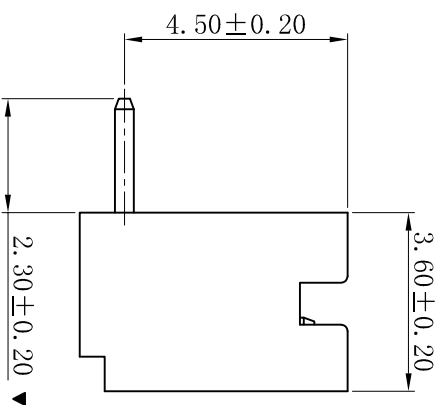

- SPECIFICATIONS
- Voltage rating: 125V AC, DC
 - Current rating: 1.0A, AC, DC
 - Withstanding Voltage: 500V AC/minute
 - Insulation resistance: 100MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- WAFER
- Part No.: W1252R-NP
 - Poles : 02-15P
 - Housing Material: PA66 UL94V-0
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked "▼" Must Be Recorded

Poles	Dimension (mm)	
	A	B
02	1.25	3.75
03	2.50	5.00
04	3.75	6.25
05	5.00	7.50
06	6.25	8.75
07	7.50	10.00
08	8.75	11.25
09	10.00	12.50
10	11.25	13.75
11	12.50	15.00
12	13.75	16.25
13	15.00	17.50
14	16.25	18.75
15	17.50	20.00

更新图面		2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE: 0±0.30 .0±0.25 .000±0.20 ANGLE: ±1°		投影法 Projection MM		品名 (PART NAME) DF13 1.25mm 90° Wafer Connector Series		料号 (PART NO) W1252R-NP		状态码 C
修订版本		2015-11-04	陈雄军	绘图/DR 陈雄军		单位 Unit MM		大小/Scale 1:1		页码/SHEET 1/1		
变更图宽格式内容		2013-12-27	陈雄军	审核/CHECK 陈雄军		比例/Scale 1:1		大小/Size A4		页码/SHEET 1/1		
新版本		2011-05-24	陈雄军	批准/APPRO 胡进		日期/DATE 2019-06-03		版本/Rev D				
说明			承认	日期/DATE		APPRO.		DESCRIPTION				
版次												
REV.												

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd