
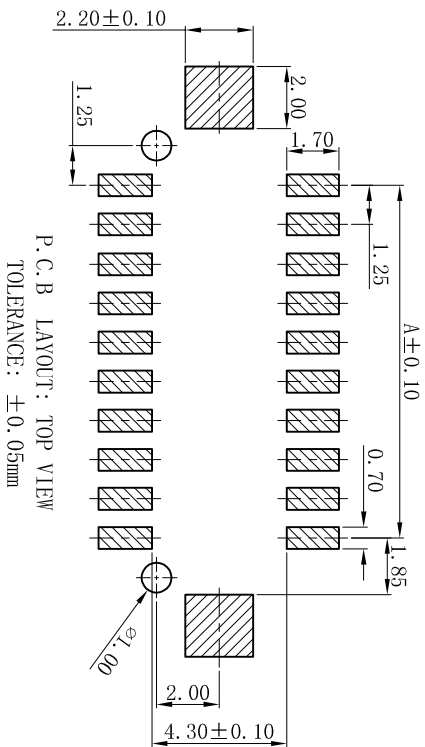


RoHS

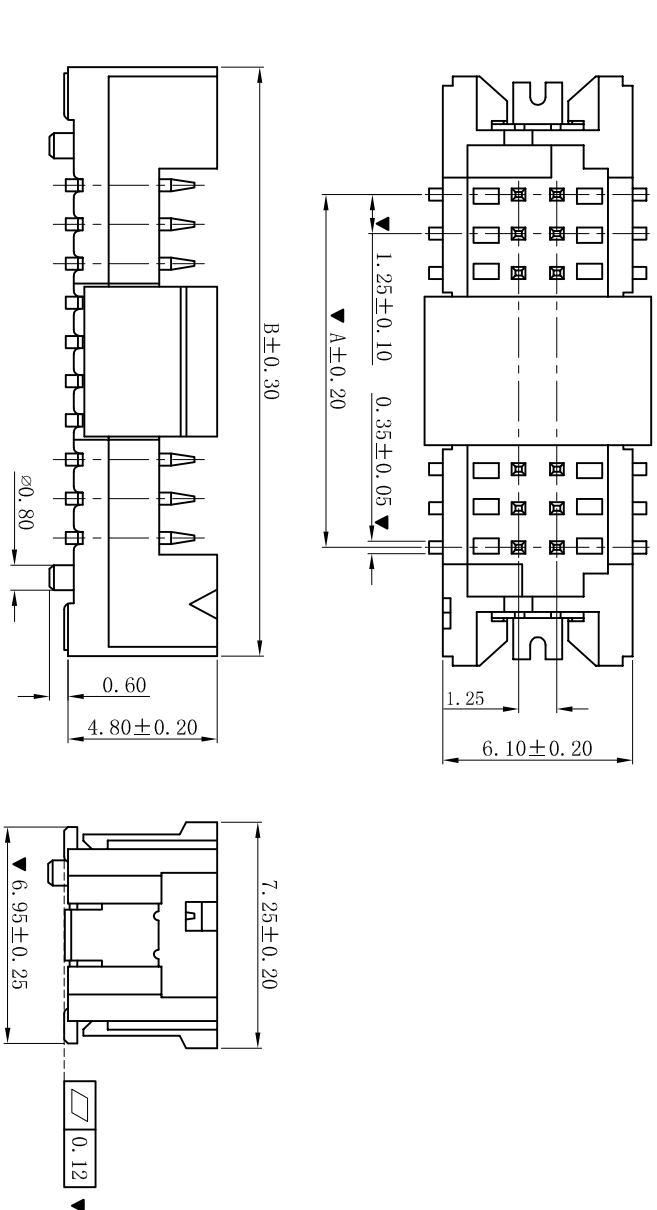

- SPECIFICATIONS
- Voltage rating: 125V AC, DC
  - Current rating: 1.0A, AC, DC
  - Withstanding Voltage: 500V AC/minute
  - Insulation resistance:  $100M\Omega$  min
  - Temperature range:  $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
  - Contact resistance:  $20m\Omega$  max
- WAFER
- Part No.: W1252SV-2xNP
  - Poles : 10、14、20、30、40P
  - Housing Material: PA6T UL94V-0
  - Cap Material: PA6T UL94V-0
  - Pin Material: Brass
  - Contact Area Plating: Tin-Plated
  - The Dimension Marked “▼” Must Be Recorded

Poles	Dimension (mm)	
	A	B
2x05	5.00	12.50
2x07	7.50	15.00
2x10	11.25	18.75
2x15	17.50	25.00
2x20	23.75	31.25

D	更新图面	2019-06-03	陈雄军	更新图面
C	修打版本	2015-11-04	陈雄军	修打版本
B	变更图宽格式内容	2013-12-27	陈雄军	变更图宽格式内容
A	新版本	2011-05-24	陈雄军	新版本
H	版次	说明	日期	承认
1	REV.	DESCRIPTION	DATE	APPRO.

一般公差 GENERAL TOLERANCE: 0 $\pm$ 0.30 .0 $\pm$ 0.25 .000 $\pm$ 0.20 ANGLE: $\pm 1^{\circ}$		投影法 Projection 	
绘图/DR	陈雄军	单位 Unit	MM
审核/CHECK	陈雄军	比例/Scale	1:1
核准/APPRO	胡进	大小/Size	A4
日期/DATE	2019-06-03	页码/SHEET	1/1
XYDZ® 东莞市祥运连接器有限公司 Dongguan XiangYun Connectors CO., Ltd		料号 (PART NO)	W1252SV-2xNP
Connectors Dongguan XiangYun Connectors CO., Ltd		品名 (PART NAME)	DF13 1.25mm SMT 180° Wafer Connector Series
		版本号	D
		状态码	C