


ROHS

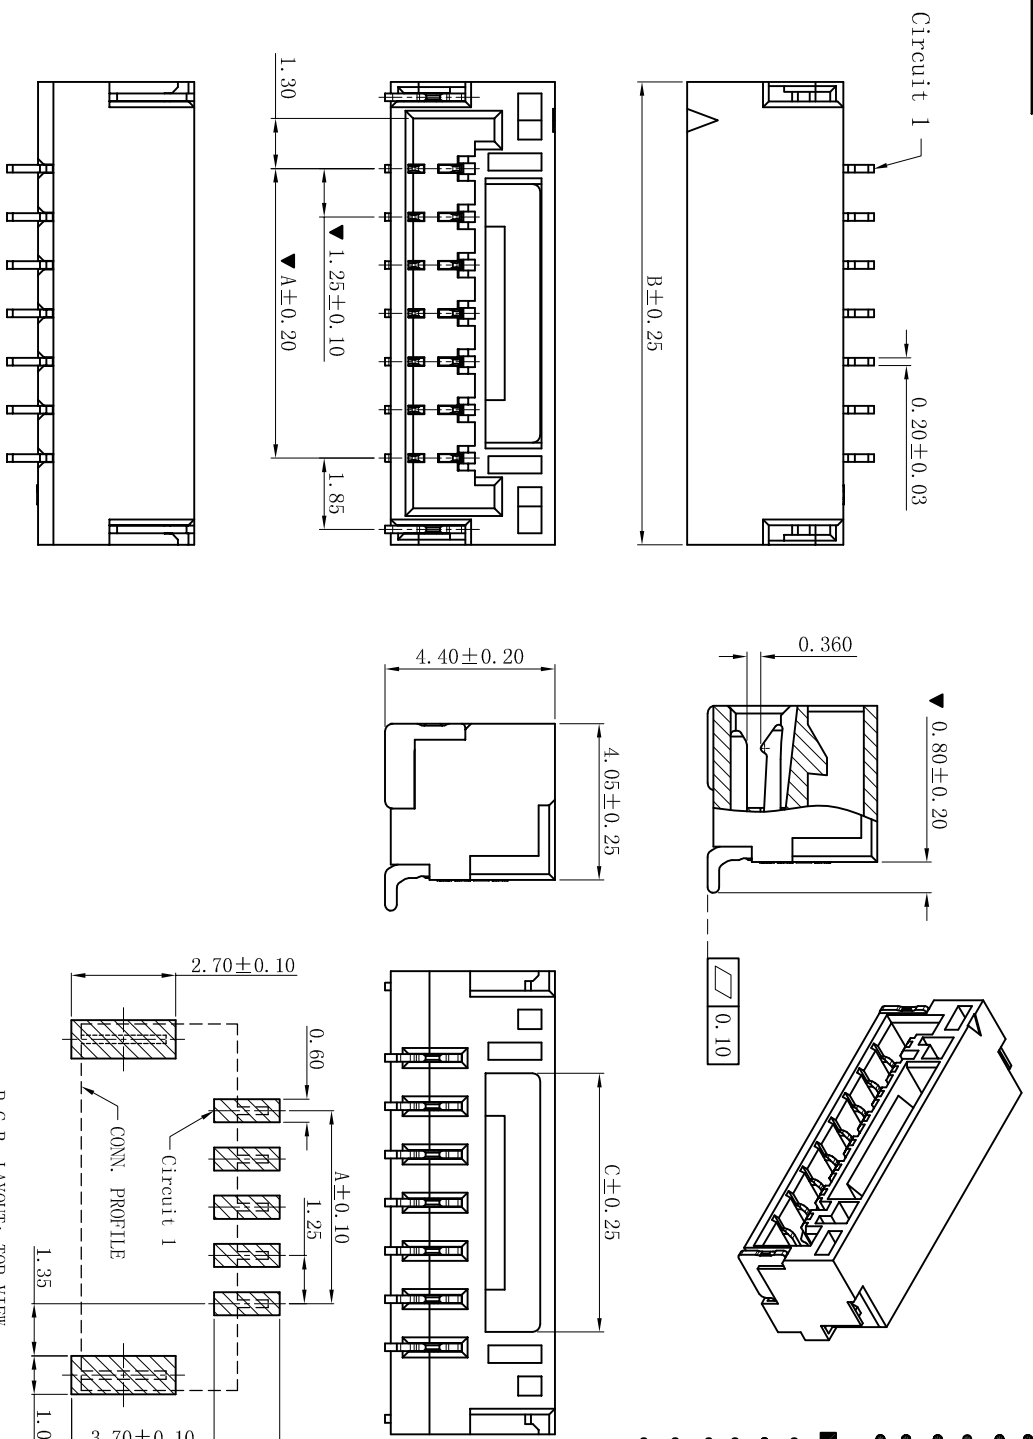

- SPECIFICATIONS**
- Voltage rating: 50V AC, DC
 - Current rating: 1A, AC, DC
 - Withstanding Voltage: 500V AC/minute
 - Insulation resistance: 100MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 30mΩ max
- WAFER**
- Part No.: W1257SR-NP
 - Poles: 02-15P
 - Material: PA6T UL94V-0 Natural (Beige)
 - Pin Material: Phosphor Bronze /Tin-plated
 - Solder Tab Material: Brass /Tin-plated
 - The Dimension Marked “▼” Must Be Recorded

Poles	Dimensions		
	A	B	C
2P	—	5.75	2.05
3P	2.50	7.00	3.30
4P	3.75	8.25	4.50
5P	5.00	9.50	4.50
6P	6.25	10.75	6.70
7P	7.50	12.00	6.70
8P	8.75	13.25	6.70
9P	10.00	14.50	6.70
10P	11.25	15.75	8.65
11P	12.50	17.00	8.65
12P	13.75	18.25	8.65
13P	15.00	19.50	8.65
14P	16.25	20.75	8.65
15P	17.50	22.00	8.65

P.C.B. LAYOUT: TOP VIEW
TOLERANCE: ±0.05mm

XYDZ® 东莞市祥运连接器有限公司
Dongguan Xiangyun Connector s CO., Ltd

D	更新图面	2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE: 0±0.30 -0±0.25 .000±0.05	绘图/DR 审核/CHECK 批准/APPRO	日期/DATE	承认 APPRO.	说明 DESCRIPTION
C	修订版本	2015-11-04	陈雄军	ANGLE: ±1°	陈雄军	2019-06-03	陈雄军	变更图宽格式内容
B	新版本	2011-05-24	陈雄军		胡进		陈雄军	新版本
A	版次 REV.	1			胡进		陈雄军	说明 DESCRIPTION

投影法 Projection	品名 (PART NAME)	料号 (PART NO)	状态码
MM	GH1.25mm SWT 90° Wafer Connector Series	W1257SR-NP	C
单位 Unit	大小/Size	页码/SHEET	
1:1	A4	1/1	
版本/Rev	D		