
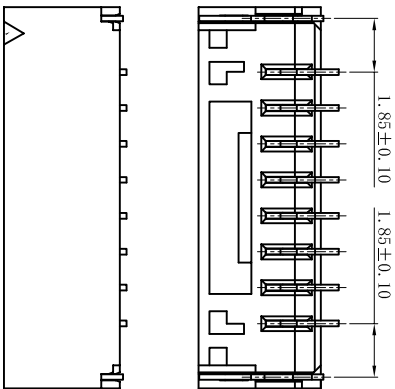
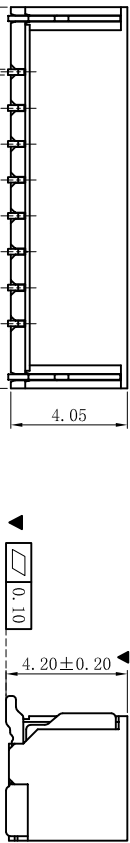


RoHS

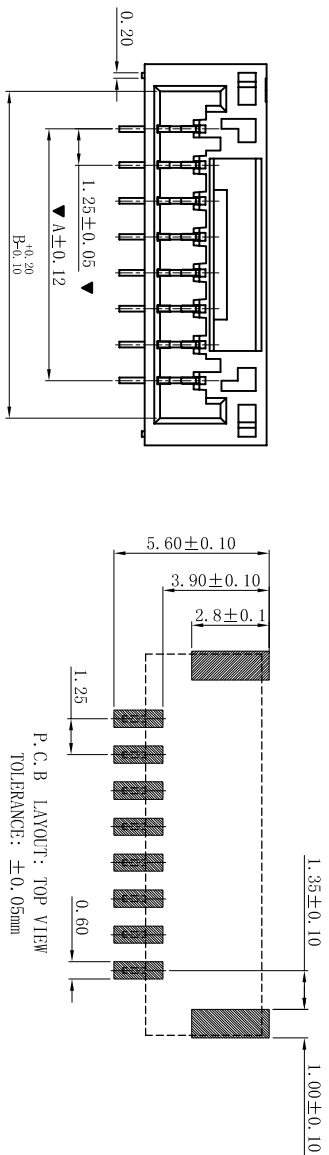

- SPECIFICATIONS
- Voltage rating: 50V AC, DC
 - Current rating: 1.0A, AC, DC
 - Withstanding Voltage: 500V AC/minute
 - Insulation resistance: 100MΩ min
 - Temperature range: -25°C~+85°C
 - Contact resistance: 20mΩ max
- WAFER
- Part No.: W1257SV-NP-YZ
 - Poles: 02-15P
 - Housing Material: PA9T UL94V-0
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked "▲" Must Be Recorded

Poles	Dimensions (mm)		
	A	B	C
02	1.25	3.85	5.75
03	2.50	5.10	7.00
04	3.75	6.35	8.25
05	5.00	7.60	9.50
06	6.25	8.85	10.75
07	7.50	10.10	12.00
08	8.75	11.35	13.25
09	10.00	12.60	14.50
10	11.25	13.85	15.75
11	12.50	15.10	17.00
12	13.75	16.35	18.25
13	15.00	17.60	19.50
14	16.25	18.85	20.75
15	17.50	20.10	22.00

D	更新图面	2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE: 0±0.30 .0±0.25 .000±0.05 ANGLE: ±1°	日期/DATE	2019-06-03
C	修订版本	2015-11-04	陈雄军	绘图/DR	日期/DATE	2019-06-03
B	变更图宽格式内容	2013-12-27	陈雄军	审核/CHECK	日期/DATE	2019-06-03
A	新版本	2011-05-24	陈雄军	核准/APPRO	日期/DATE	2019-06-03
H	版次 REV.	说明 DESCRIPTION	承认 APPRO.	日期/DATE	日期/DATE	日期/DATE

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

投影法
Projection

单位 Unit
MM

比例/Scale
1:1

大小/Size
A4

页码/SHEET
1/1

版本/Rev
D

品名
(PART NAME)
GH1.25mm SMT 180° Wafer
Connector Series

料号
(PART NO)
W1257SV-NP-YZ

状态码
C