
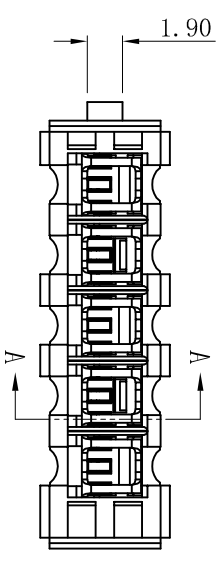
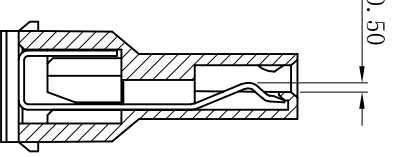
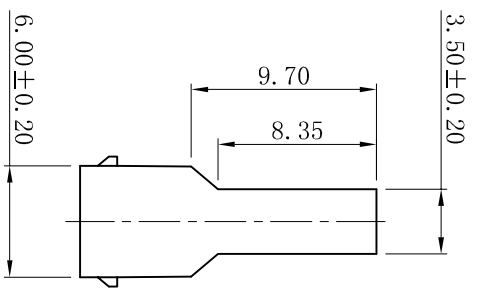
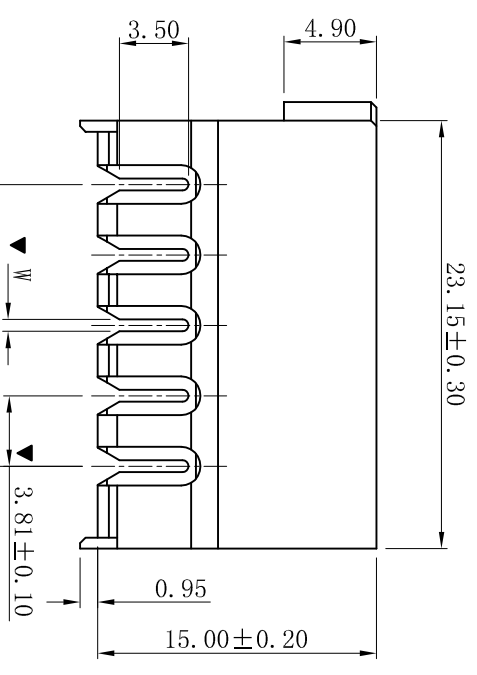


RoHS

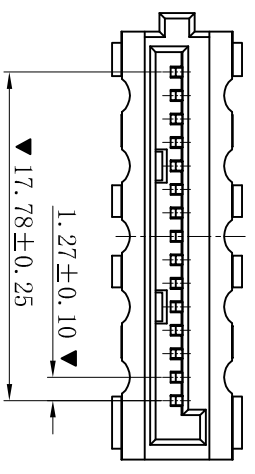

F3810-15-18#	W=0.52 Wire:AWG18#
F3810-15-20#	W=0.57 Wire:AWG20#
F3810-15-22#	W=0.62 Wire:AWG22#

- SPECIFICATIONS
 - Voltage rating: 30V AC, DC
 - Current rating: 1.5A, AC, DC
 - Withstanding Voltage: 500V AC/minute
 - Insulation resistance:1000MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- HOUSING
 - Part No. : F3810-15P-XX#
 - Housing Material : PBT+30%G.F UL94V-0 Black
 - Ter Material : Phosphor Bronze
 - Contact Area Plating: Gold-flash/Tin-plated
 - The Dimension Marked “▼” Must Be Recorded

更新图面		2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE: 0±0.30 .0±0.25 .00±0.20 .000±0.05		投影法 Projection 单位 Unit MM		品名 (PART NAME) SATA 1.27mm 15P 刺破式 Connector Series		料号 (PART NO) F3810-15P-XX#		状态码 C
修订版本		2015-11-04	陈雄军	ANGLE: ±1°		审核/CHECK 胡进		大小/SIZE A4				
变更图宽格式内容		2013-12-27	陈雄军			日期/DATE 2019-06-03		页码/SHEET 1/1				
新版本		2011-05-24	陈雄军			日期/DATE		版本/Rev D				
说明			承认									
DESCRPTION			APPRO.									
版次												
REV.												

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd