
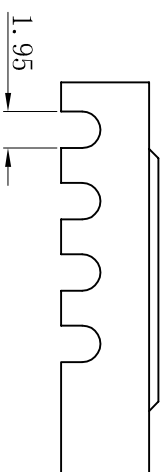

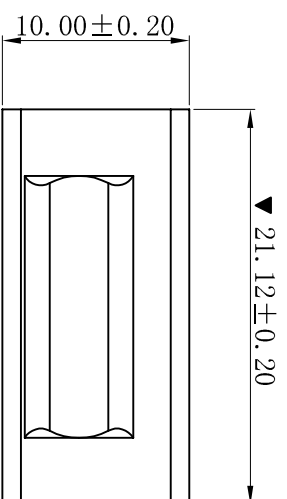
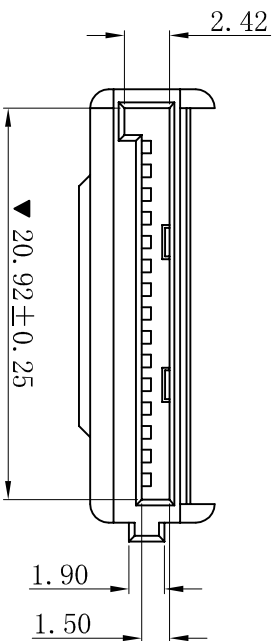
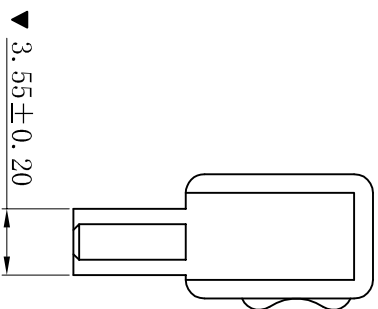


RoHS

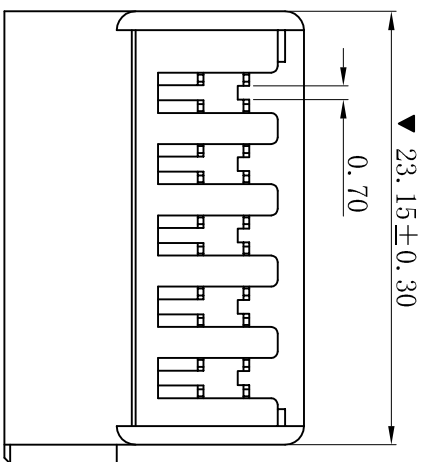

■ SPECIFICATIONS

- Voltage rating: 30V AC, DC
- Current rating: 1.5A, AC, DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C

■ HOUSING

- Part No. : F3811-15P
- Housing Material : PBT UL94V-0 Black
- The Dimension Marked “▼” Must Be Recorded

D	更新图面	2019-06-03	陈雄军
C	修订版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军
H	说明	日期	承认
1	版次	REV.	APPRO.

一般公差	0±0.30
GENERAL TOLERANCE:	.00±0.25
	.000±0.05
ANGLE: ±1°	

XYDZ® 东莞市祥运连接器有限公司	投影法	品名	SATA1.27mm 15P Housing
Connectors	单位 Unit	(PART NAME)	Connector Series
Dongguan XiangYun Connectors CO., Ltd	比例/Scale	料号	F3811-15P
	大小/Size	(PART NO)	
	页码/Sheet		
	版本/Rev		

1	2	3	4	5
6	7	8	9	10

绘图/DR	陈雄军	审核/CHECK	陈雄军	批准/APPRO	胡进	日期/DATE	2019-06-03
-------	-----	----------	-----	----------	----	---------	------------

H	C
---	---