

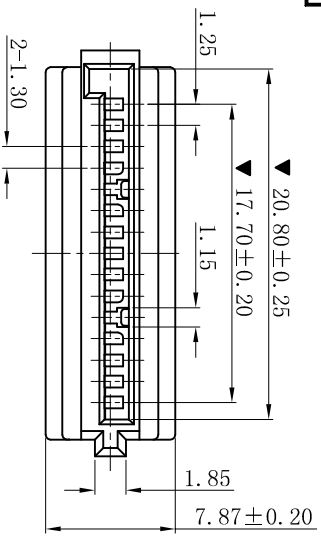



RoHS

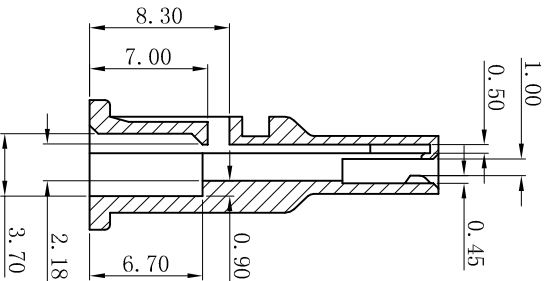

▼ 5.70±0.20
▼ 3.45±0.15

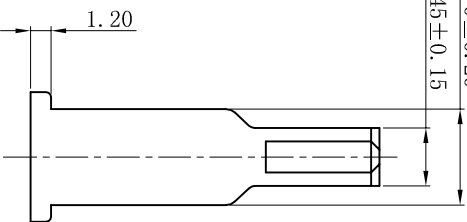

SECTION: A-A

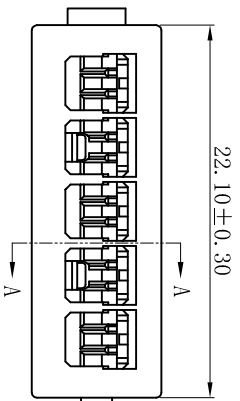

- SPECIFICATIONS
- Voltage rating: 30V AC, DC
 - Current rating: 1.5A, AC, DC
 - Withstanding Voltage: 500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
- HOUSING
- Part No. : H3810-15P
 - Housing Material : PBT UL94V-0 Black
 - The Dimension Marked "▼" Must Be Recorded

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

| | |
|-------------------------------|--|
| 一般公差 GENERAL TOLERANCE: | 0±0.30 .0±0.25 .000±0.20 ANGLE: ±1° |
|-------------------------------|--|

投影法
Projection



单位 Unit
MM

比例/Scale
1:1

页码/SHEET
1/1

品名
(PART NAME)

SATA1.27mm 15P Housing
Connector Series

料号
(PART NO)

H3810-15P

更新图面

2019-06-03

陈雄军

修订版本

2015-11-04

陈雄军

变更图宽格式内容

2013-12-27

陈雄军

新版本

2011-05-24

陈雄军

说明

日期

承认

版次

REV.

1

DESCRIPTION

状态码
C