
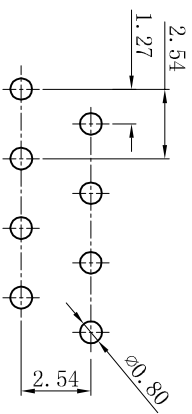

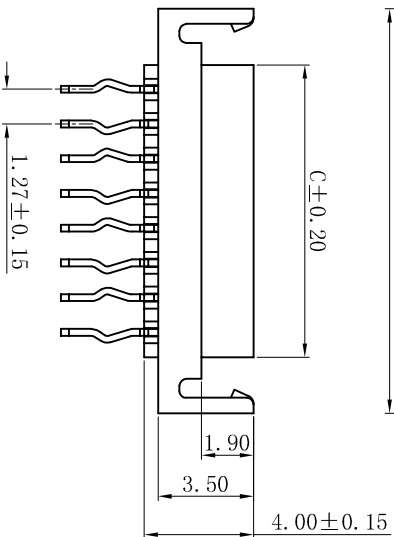


RoHS

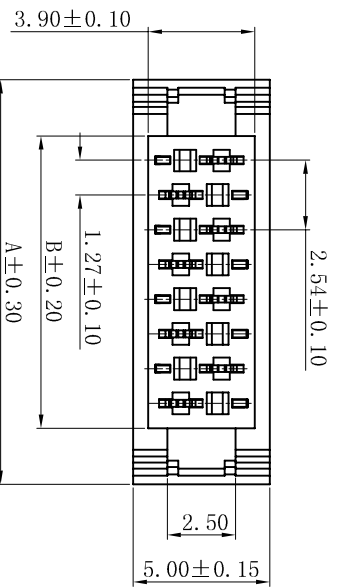

RECOMMENDED P. C. B LAYOUT (TOP SIDE)
(PCB BOARD TOLERANCE: ±0.05mm)

- SPECIFICATIONS
- Voltage Rating: 500V AC, DC
 - Current Rating: 1.0A, AC, DC
 - Withstanding Voltage: 500V AC/minute
 - Insulation Resistance: 100MΩ min
 - Temperature range: -25° C +85° C
 - Contact resistance: 20mΩ max
- WAFER
- Part No. : W1271V-NP-B
 - Poles : 04-26P
 - Material : PA9T UL94V-0
 - Pin Material : Bronze
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked “▲” Must Be Recorded

Poles	Dimensions (mm)		
	A	B	C
04	9.70	3.81	5.60
06	12.24	6.35	8.14
08	14.78	8.89	10.68
10	17.32	11.43	13.22
12	19.86	13.97	15.76
14	22.40	16.51	18.30
16	24.94	19.05	20.84
18	27.48	21.59	23.38
20	30.02	24.13	25.92
22	32.56	26.67	28.46
24	35.10	29.21	31.00
26	37.64	31.75	33.54

更新图面		2019-06-03	陈雄军
新版本		2015-6-18	陈雄军
说明		日期	承认
DESCRPTION		DATE:	APPRO.

一般公差	0±0.30
GENERAL TOLERANCE:	.00±0.25
	.000±0.05
	ANGLE: ±1°

XYDZ® 东莞市祥运连接器有限公司
Dongguan Xiangyun Connector s CO., Ltd

投影法
单位 Unit: MM
比例/Scale: 1:1
大小/Size: A4
页码/Sheet: 1/1
版本/Rev: B

品名 (PART NAME): IDC 1.27mm 180° Wafer
料号 (PART NO): W1271V-NP-B

连接器系列: Connector Series

状态码: C