
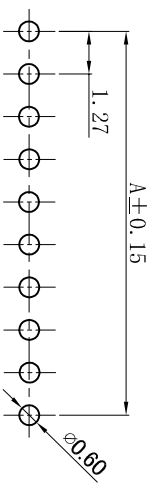

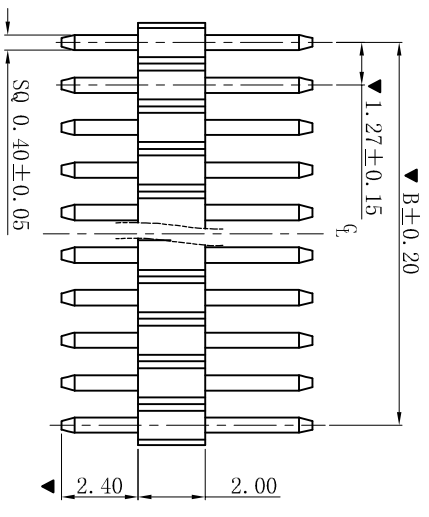


RoHS

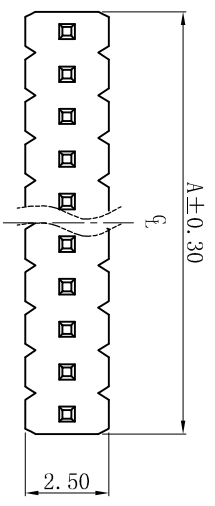

P. C. B LAYOUT: TOP VIEW  
TOLERANCE: ±0.05mm

- SPECIFICATIONS
- Current rating: 1A, AC, DC
  - Withstanding Voltage: 500V AC/minute
  - Insulation resistance: 1000MΩ min
  - Temperature range: -40° C~+105° C
  - Contact resistance: 20mΩ max

- WAFER
- Part No.: W1270V-1xNP
  - Poles : 01-50P
  - Housing Material: PA6T U94V-0 Black.
  - Pin Material: Brass
  - Contact Area Plating: Gold Flash
  - The Dimension Marked “▲” Must Be Recorded

Poles	Dimensions (mm)		Dimensions (mm)	
	A	B	A	B
1x01	1.10	0.00	1x26	32.85
1x02	2.37	1.27	1x27	34.12
1x03	3.64	2.54	1x28	35.39
1x04	4.91	3.81	1x29	36.66
1x05	6.18	5.08	1x30	37.93
1x06	7.45	6.35	1x31	39.20
1x07	8.72	7.62	1x32	40.47
1x08	9.99	8.89	1x33	41.74
1x09	11.26	10.16	1x34	43.01
1x10	12.53	11.43	1x35	44.28
1x11	13.80	12.70	1x36	45.55
1x12	15.07	13.97	1x37	46.82
1x13	16.34	15.24	1x38	48.09
1x14	17.61	16.51	1x39	49.36
1x15	18.88	17.78	1x40	50.63
1x16	20.15	19.05	1x41	51.90
1x17	21.42	20.32	1x42	53.17
1x18	22.69	21.59	1x43	54.44
1x19	23.96	22.86	1x44	55.71
1x20	25.23	24.13	1x45	56.98
1x21	26.50	25.40	1x46	58.25
1x22	27.77	26.67	1x47	59.52
1x23	29.04	27.94	1x48	60.79
1x24	30.31	29.21	1x49	62.06
1x25	31.58	30.48	1x50	63.33

**XYDZ® 东莞市祥运连接器有限公司**  
Dongguan XiangYun Connectors CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .00±0.25 .000±0.10
ANGLE: ±1°	
绘图/DR	陈雄军
审核/CHECK	胡进
批准/APPRO	
日期/DATE	2019-06-03

投影法 Projection	第一角投影
单位 Unit	MM
比例/Scale	1:1
大小/SIZE	A4
页码/SHEET	1/1
版本/Rev	B

品名 (PART NAME)	1.27mm 180° 排针 Connector Series
料号 (PART NO)	W1272V-1xNP
状态码	C

更新图面	2019-06-03	段平会
新版本	2018-07-19	承认
说明	日期	APPRO.
版次	DESCRIPTION	
REV.		