RoHS

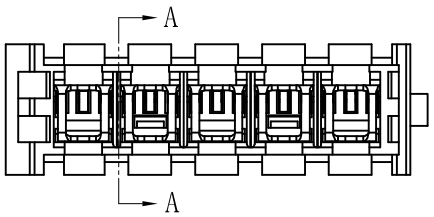

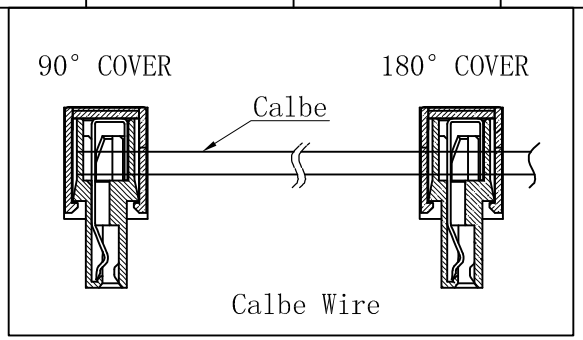

■ SPECIFICATIONS

- Voltage rating: 15V AC, DC
- Current rating: 1.5A, AC, DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance:1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No.: W3812M0XX-15P
- Housing : PBT+15%G.F UL94V-0 RED
- Cover: PA66 UL94V-2
- Terminal: Phosphor Bronze
  Plating: Gold-plated Contact area,
  Tin-plated other area.
- The Dimension Marked "▼" Must Be Recorded

W3800-15-18#	Wire:AWG18#
W3800-15-20#	Wire:AWG20#
W3800-15-22#	Wire:AWG22#
W3800-15-24#	Wire:AWG24#

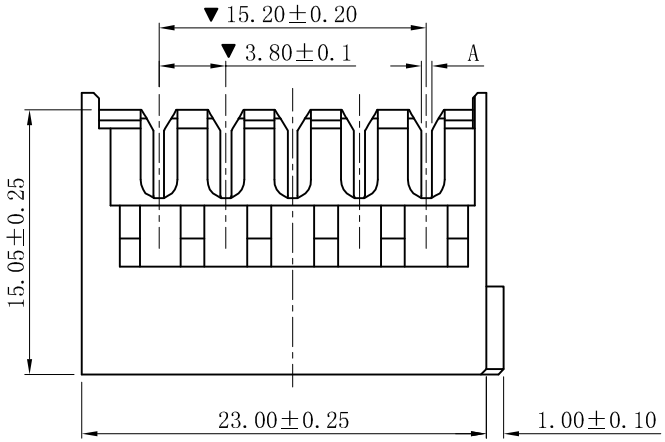

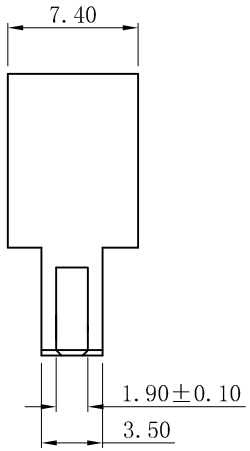

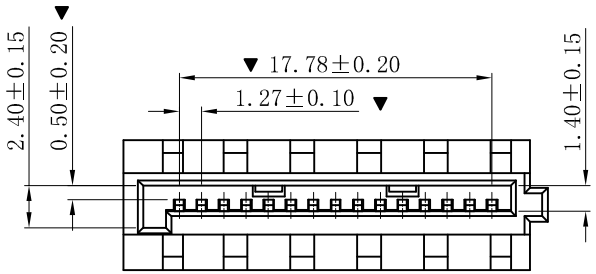

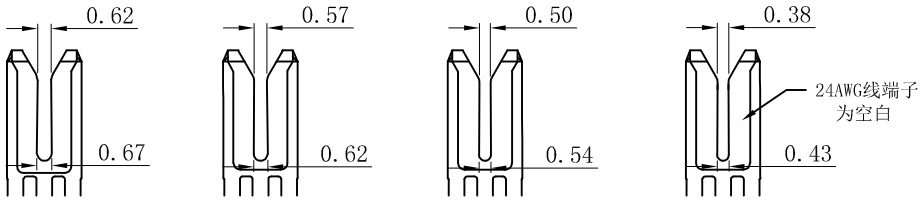

A型 18AWG线端子　B型 20AWG线端子　C型 22AWG线端子　C型 24AWG线端子

SECTION:A-A

版次 REV.	说明 DESCRIPTION	日期 DATE.	承认 APPRO.
B	更新图面	2019-06-03	PH.Duan
A	新版本	2018-08-02	段平会

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE.±1°
绘图/DR	PH.Duan
审核/CHECK	陈雄军
核准/APPRO	胡 进
日期/DATE	2019-06-03

XYDZ® 东莞市祥运连接器有限公司
Connectors DongGuan XiangYun Connectors CO.,Ltd

投影法 Projection		品 名 (PART NEME)	SATA 1.27mm 15P 刺破式防脱型 Connector Series
单位 Unit	MM		
比例/Scale	1:1		
大小/SIZE	A4	料 号 (PART NO)	W3800-15P-XX#
页码/SHEET	1/1		状态码 C
版本/Rev	B		