


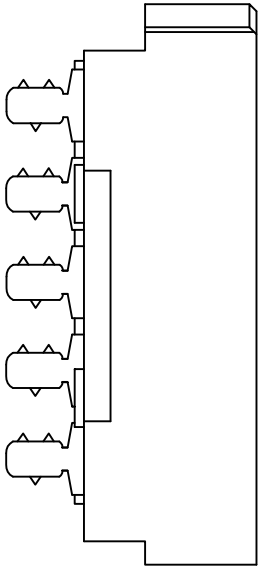


RoHS

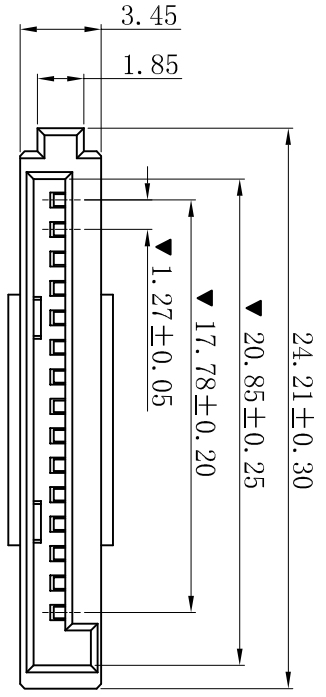

- SPECIFICATIONS
- Voltage rating: 150V AC, DC
 - Current rating: 1.0A, AC, DC
 - Withstanding Voltage: 500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- WAFER
- Part No.: W3812HXS-15P
 - Housing Material: PBT UL94V-0 Black
 - Ter Material: Phosphor Bronze
 - Contact Area Plating: Tin-plated
 - The Dimension Marked “▼” Must Be Recorded



更新图面		2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE: 0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE: ±1°		投影法 Projection 单位 Unit MM		品名 (PART NAME) SATA 1.27mm 15P 焊线式 Connector Series		料号 (PART NO) W3812HXS-15P		状态码 C
修订版本		2015-11-04	陈雄军	绘图/DR 陈雄军		审核/SCALE 1:1		东莞市祥运连接器有限公司 Dongguan XiangYun Connectors CO., Ltd				
变更图宽格式内容		2013-12-27	陈雄军	核准/APPRO 胡进		大小/SIZE A4						
新版本		2011-05-24	陈雄军	日期/DATE 2019-06-03		页码/SHEET 1/1						
说明			承认	日期/DATE		版本/Rev D						
DESCRPTION			APPRO.	日期/DATE		版本/Rev						
版次				日期/DATE		版本/Rev						
REV.				日期/DATE		版本/Rev						