
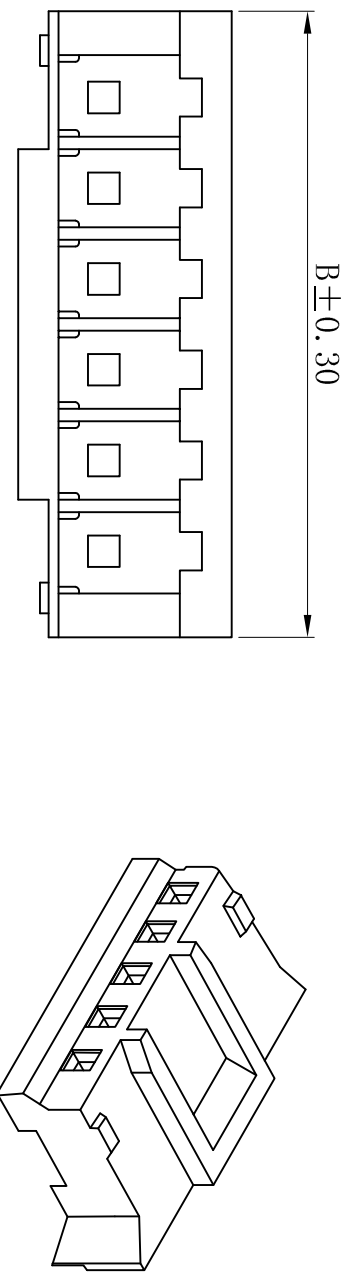


RoHS

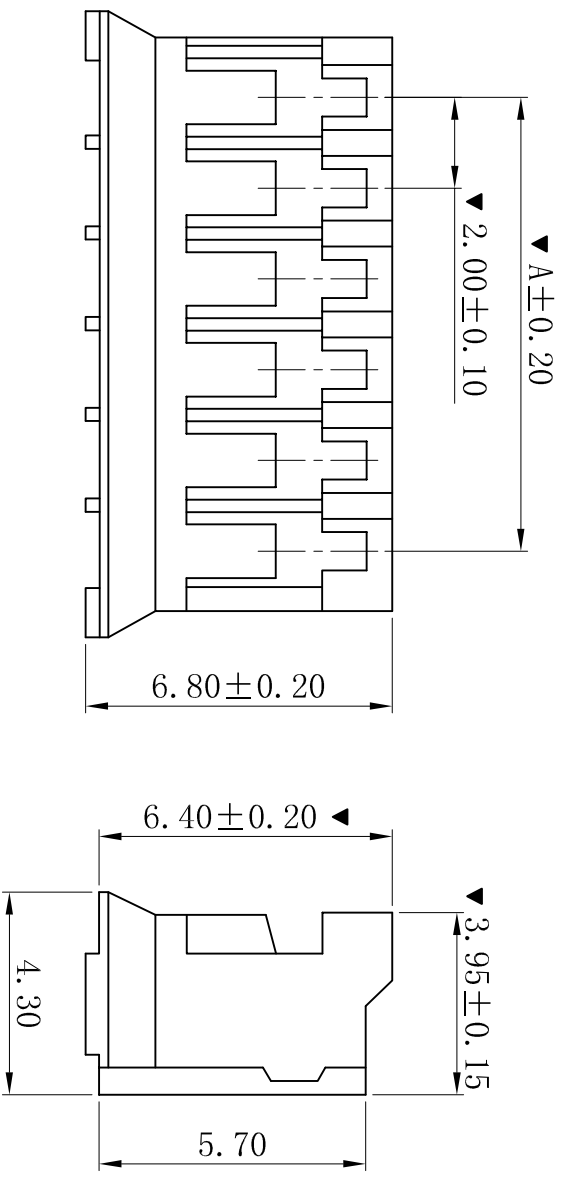

- SPECIFICATIONS
- Voltage rating: 100V AC, DC
  - Current rating: 2A, AC, DC
  - Withstanding Voltage: 800V AC/minute
  - Insulation resistance: 1000MΩ min
  - Temperature range: -25° C~+85° C
- HOUSING
- Part No.: H2001-NP-Z
  - Poles : 02-16P
  - Housing Material: PA66 UL94V-0
  - The Dimension Marked “▲” Must Be Recorded

Poles	Dimensions (mm)	
	A	B
02	2.00	5.80
03	4.00	7.80
04	6.00	9.80
05	8.00	11.80
06	10.00	13.80
07	12.00	15.80
08	14.00	17.80
09	16.00	19.80
10	18.00	21.80
11	20.00	23.80
12	22.00	25.80
13	24.00	27.80
14	26.00	29.80
15	28.00	31.80
16	30.00	33.80

更新图面		2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE: ±0.30 .00±0.25 .000±0.05		投影法 Projection MM		品名 (PART NAME) PH 2.00mm Housing Connector Series		料号 (PART NO) H2001-NP-Z		状态码 C
修打版本		2015-11-04	陈雄军	ANGLE: ±1°		单位 Unit		东莞市祥运连接器有限公司 Dongguan XiangYun Connectors CO., Ltd				
变更图规格式内容		2013-12-27	陈雄军	绘图/DR		比例/Scale						
新版本		2011-05-24	陈雄军	审核/CHECK		大小/Size						
说明		2011-05-24	陈雄军	核准/APPRO		页码/SHEET						
DESCRPTION		2019-06-03	承认	日期/DATE		版本/Rev						