
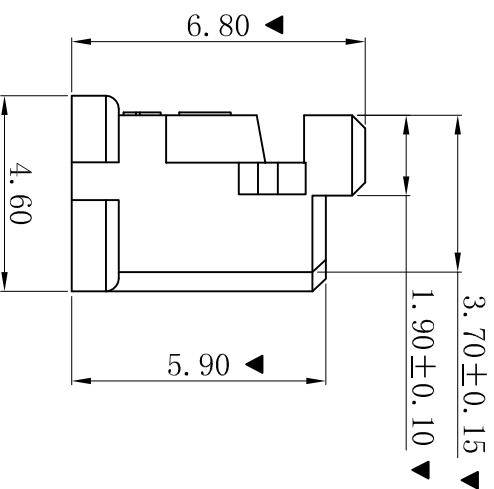
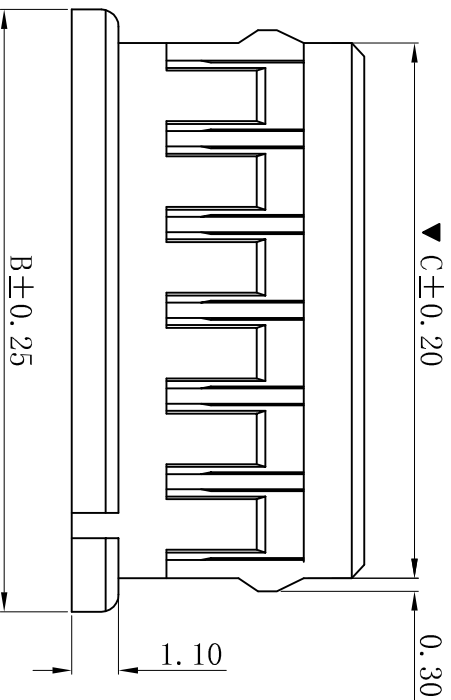


ROHS

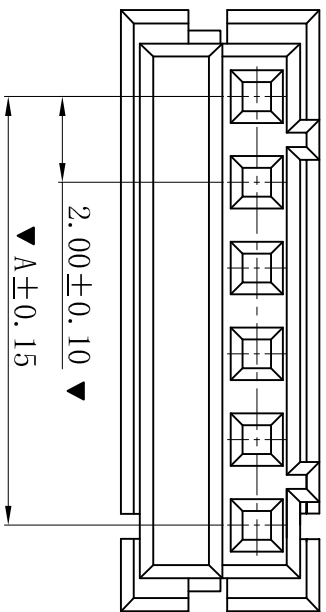

- SPECIFICATIONS**
- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 800V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
- HOUSING**
- Part No. : H2006-NP
 - Poles : 02-15P
 - Housing Material : PA66 UL94V-0
 - The Dimension Marked “▼” Must Be Recorded

Poles	Dimensions (mm)		
	A	B	C
02	2.00	6.00	4.45
03	4.00	8.00	6.45
04	6.00	10.00	8.45
05	8.00	12.00	10.45
06	10.00	14.00	12.45
07	12.00	16.00	14.45
08	14.00	18.00	16.45
09	16.00	20.00	18.45
10	18.00	22.00	20.45
11	20.00	24.00	22.45
12	22.00	26.00	24.45
13	24.00	28.00	26.45
14	26.00	30.00	28.45
15	28.00	32.00	30.45

D	更新图面	2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05
C	修订版本	2015-11-04	陈雄军	绘图/DR	ANGLE: ±1°
B	变更图宽格式内容	2013-12-27	陈雄军	审核/CHECK	
A	新版本	2011-05-24	陈雄军	批准/APPRO	
H	说明	日期	承认	日期/DATE	
1	版次	REV.	DESCRIPTION	DATE	

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connector's CO., Ltd

投影法
Projection
单位 Unit
MM

品名
(PART NAME)
DF3 2.00mm Housing
Connector Series

料号
(PART NO)
H2006-NP

状态码
C