
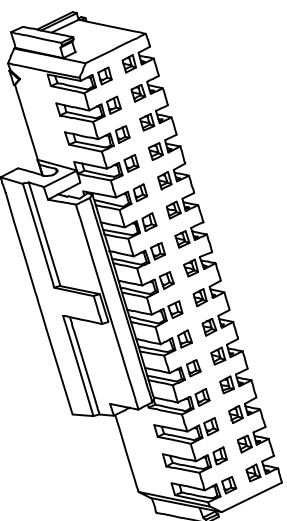
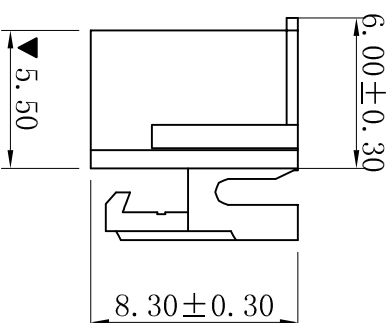
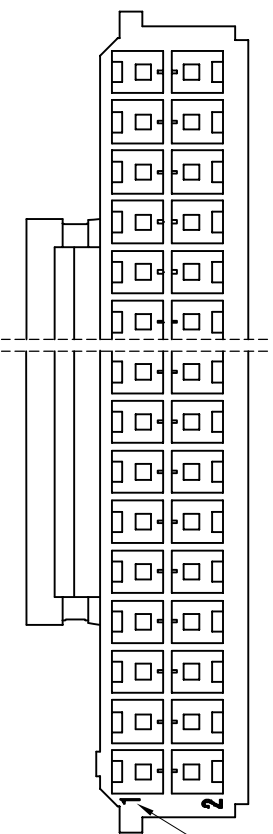
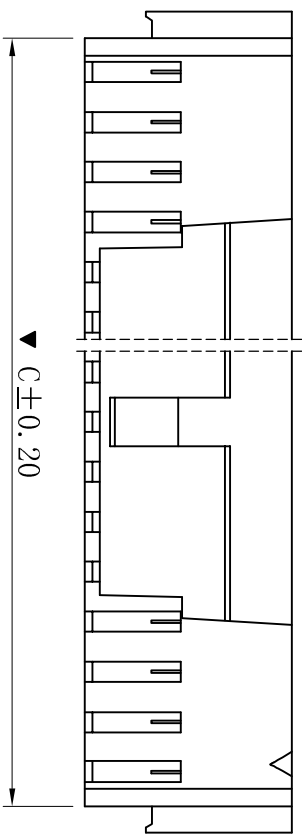


RoHS

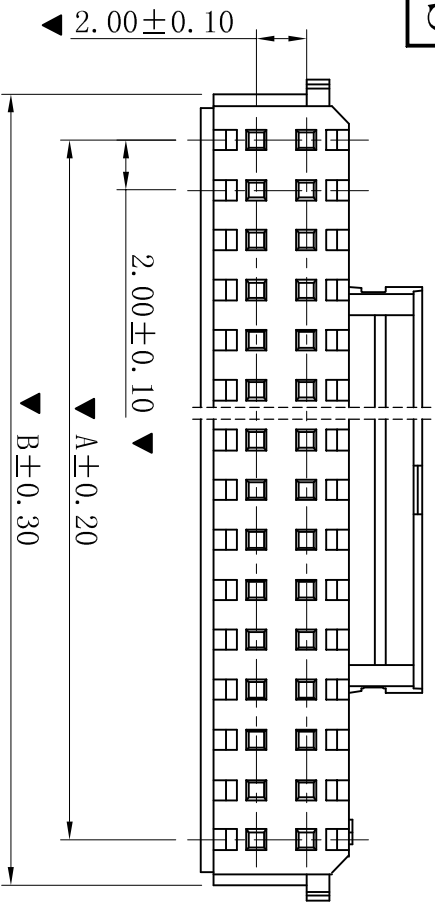

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 1000V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
- HOUSING
- Part No. : H2007-2xNP
 - Poles : 04-40P & 60P
 - Housing Material : PA66 UL94V-0
 - The Dimension Marked “▼” Must Be Recorded

Poles	Dimensions (mm)		
	A	B	C
2x02	2.00	5.65	4.70
2x03	4.00	7.65	6.70
2x04	6.00	9.65	8.70
2x05	8.00	11.65	10.70
2x06	10.00	13.65	12.70
2x07	12.00	15.65	14.70
2x08	14.00	17.65	16.70
2x09	16.00	19.65	18.70
2x10	18.00	21.65	20.70
2x11	20.00	23.65	22.70
2x12	22.00	25.65	24.70
2x13	24.00	27.65	26.70
2x14	26.00	29.65	28.70
2x15	28.00	31.65	30.70
2x16	30.00	33.65	32.70
2x17	32.00	35.65	34.70
2x18	34.00	37.65	36.70
2x19	36.00	39.65	38.70
2x20	38.00	41.65	40.70
2x30	58.00	61.65	60.70

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

一般公差
GENERAL TOLERANCE:
0 ± 0.30
.0 ± 0.25
.00 ± 0.20
.000 ± 0.05
ANGLE: ± 1°

D	更新图面	2019-06-03	陈雄军
C	修打版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军
版次 REV.	说明 DESCRIPTION	日期 DATE	承认 APPRO.
1			
2			
3			
4			
5			
6			
7			
8			
9			
10			

投影法
Projection
单位 Unit
MM
比例/Scale
1:1
大小/Size
A4
页码/Sheet
1/1
版本/Rev
D

品名
(PART NAME)
PHB 2.00mm Housing
Connector Series

料号
(PART NO)
H2007-2xNP

状态码
C