
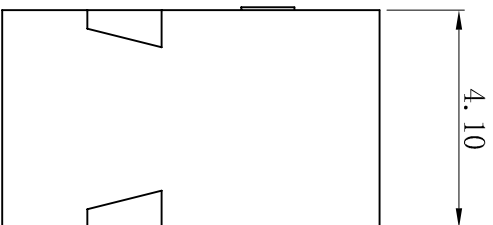
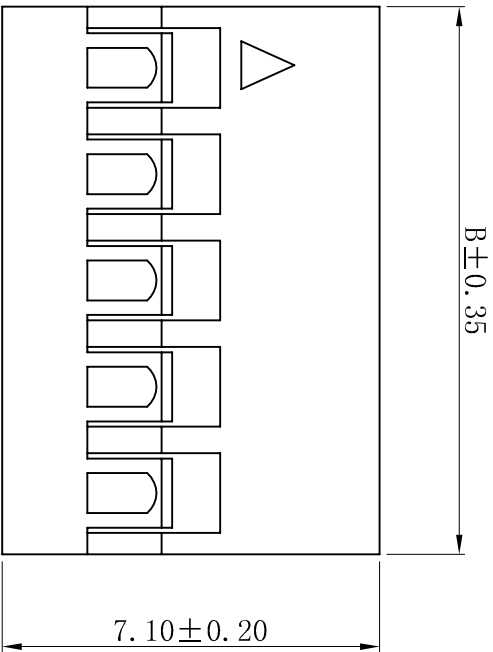
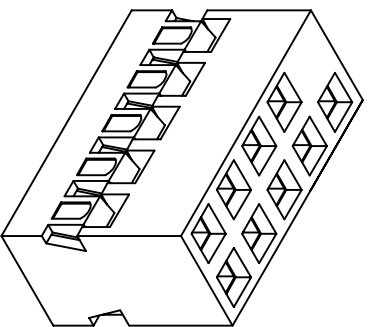


RoHS

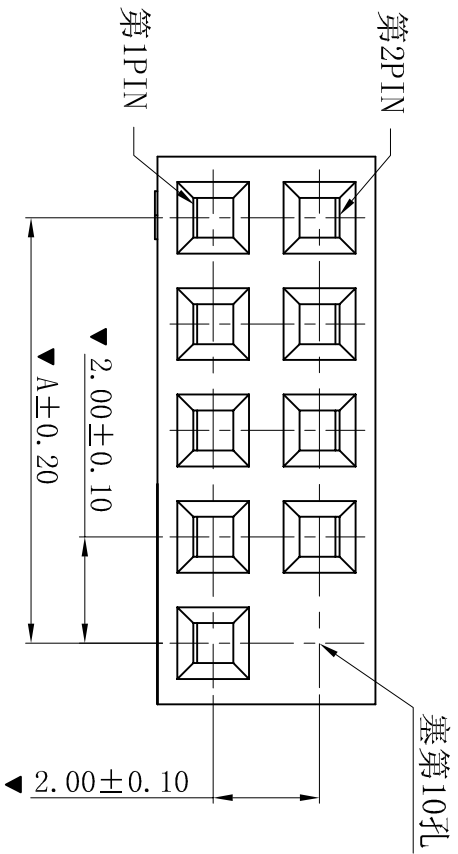

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C

■ HOUSING

- Part No. : H2010-2xNP-K10
- Poles : 04-80P
- Housing Material : PBT UL94V-0 Black
- The Dimension Marked “▼” Must Be Recorded

Poles	Dimensions(mm)		Poles		Dimensions(mm)	
	A	B	A	B	A	B
2x02	2.00	4.20	2x22	42.00	44.20	44.20
2x03	4.00	6.20	2x23	44.00	46.20	46.20
2x04	6.00	8.20	2x24	46.00	48.20	48.20
2x05	8.00	10.20	2x25	48.00	50.20	50.20
2x06	10.00	12.20	2x26	50.00	52.20	52.20
2x07	12.00	14.20	2x27	52.00	54.20	54.20
2x08	14.00	16.20	2x28	54.00	56.20	56.20
2x09	16.00	18.20	2x29	56.00	58.20	58.20
2x10	18.00	20.20	2x30	58.00	60.20	60.20
2x11	20.00	22.20	2x31	60.00	62.20	62.20
2x12	22.00	24.20	2x32	62.00	64.20	64.20
2x13	24.00	26.20	2x33	64.00	66.20	66.20
2x14	26.00	28.20	2x34	66.00	68.20	68.20
2x15	28.00	30.20	2x35	68.00	70.20	70.20
2x16	30.00	32.20	2x36	70.00	72.20	72.20
2x17	32.00	34.20	2x37	72.00	74.20	74.20
2x18	34.00	36.20	2x38	74.00	76.20	76.20
2x19	36.00	38.20	2x39	76.00	78.20	78.20
2x20	38.00	40.20	2x40	78.00	80.20	80.20
2x21	40.00	42.20				

XYDZ® 东莞市祥运连接器有限公司
 Dongguan XiangYun Connectors CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05
角度/DR	ANGLE: ±1°

更新图面	2019-06-03	陈雄军
修打版本	2015-11-04	陈雄军
变更图宽格式内容	2013-12-27	陈雄军
新版本	2011-05-24	陈雄军
说明	日期	承认
DESCRIPTION	DATE	APPRO.

版次 REV.	1	2	3	4	5	6	7	8	9	10
------------	---	---	---	---	---	---	---	---	---	----

投影法 Projection	第一角	单位 Unit	MM	品名 (PART NAME)	杜邦 2.00mm Housing Connector Series		料号 (PART NO)	H2010-2xNP-K10		状态码 C
比例/Scale	1:1	大小/Size	A4	审核/CHECK	陈雄军	日期/DATE	2019-06-03	日期/DATE	2011-05-24	承认 APPRO.
核准/APPRO	胡进	日期/DATE	2019-06-03	日期/DATE	2011-05-24	承认 APPRO.	陈雄军	日期/DATE	2013-12-27	承认 APPRO.
绘图/DR	陈雄军	日期/DATE	2019-06-03	日期/DATE	2011-05-24	承认 APPRO.	陈雄军	日期/DATE	2013-12-27	承认 APPRO.
更新图面	2019-06-03	更新图面	2019-06-03	更新图面	2019-06-03	更新图面	2019-06-03	更新图面	2019-06-03	更新图面