

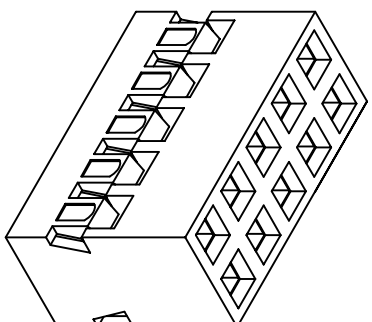



RoHS

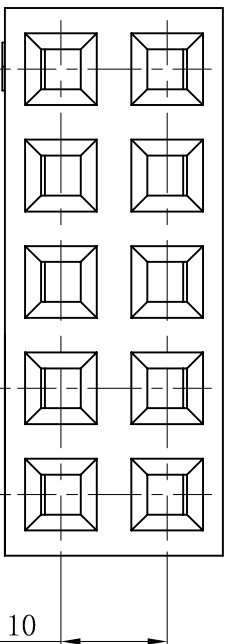


- SPECIFICATIONS**
- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 800V AC/minute
 - Insulation resistance: 1000M Ω min
 - Temperature range: -25 $^{\circ}$ C~+85 $^{\circ}$ C
- HOUSING**
- Part No.: H2010-2xNP
 - Poles : 04-80P
 - Housing Material: PBT UL94V-0 Black
 - The Dimension Marked “▼” Must Be Recorded

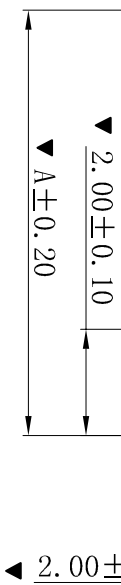

$B \pm 0.35$

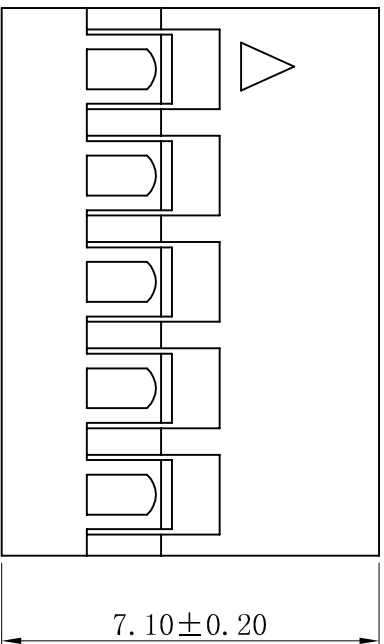

4.10

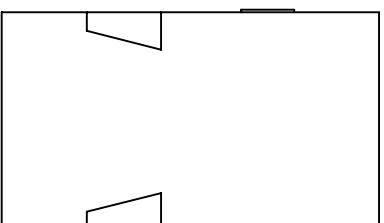

Poles	Dimensions(mm)		Poles		Dimensions(mm)	
	A	B	A	B	A	B
2x02	2.00	4.20	2x22	42.00	44.20	
2x03	4.00	6.20	2x23	44.00	46.20	
2x04	6.00	8.20	2x24	46.00	48.20	
2x05	8.00	10.20	2x25	48.00	50.20	
2x06	10.00	12.20	2x26	50.00	52.20	
2x07	12.00	14.20	2x27	52.00	54.20	
2x08	14.00	16.20	2x28	54.00	56.20	
2x09	16.00	18.20	2x29	56.00	58.20	
2x10	18.00	20.20	2x30	58.00	60.20	
2x11	20.00	22.20	2x31	60.00	62.20	
2x12	22.00	24.20	2x32	62.00	64.20	
2x13	24.00	26.20	2x33	64.00	66.20	
2x14	26.00	28.20	2x34	66.00	68.20	
2x15	28.00	30.20	2x35	68.00	70.20	
2x16	30.00	32.20	2x36	70.00	72.20	
2x17	32.00	34.20	2x37	72.00	74.20	
2x18	34.00	36.20	2x38	74.00	76.20	
2x19	36.00	38.20	2x39	76.00	78.20	
2x20	38.00	40.20	2x40	78.00	80.20	
2x21	40.00	42.20				

XYDZ[®] 东莞市祥运连接器有限公司
 Dongguan XiangYun Connectors CO., Ltd

Connectors

投影法
 Projection

单位 Unit
 Unit

比例/Scale
 Scale

大小/Size
 Size

页码/Sheet
 Sheet

版本/Rev
 Rev

品名
 (PART NAME)

料号
 (PART NO)

杜邦 2.00mm Housing
 Connector Series

H2010-2xNP

状态码
 C

公差
 TOLERANCE:
 GENERAL: 0±0.30
 .00±0.25
 .000±0.05
 ANGLE: ±1 $^{\circ}$

绘图/DR
 审核/CHECK
 批准/APPRO
 日期/DATE

陈雄军
 陈雄军
 胡进
 2019-06-03

更新图面
 2019-06-03
 陈雄军

修打版本
 2015-11-04
 陈雄军

变更图宽格式内容
 2013-12-27
 陈雄军

新版本
 2011-05-24
 陈雄军

说明
 DESCRIPTION
 日期 DATE
 承认 APPRO.

版次 REV.

1 2 3 4 5 6 7 8 9 10