

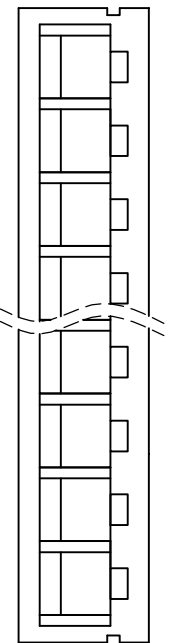
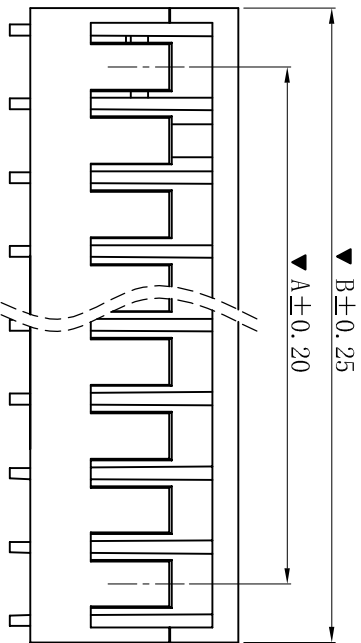


RoHS

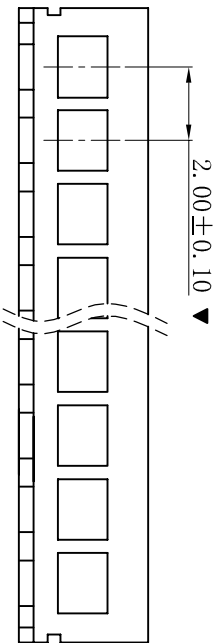

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 2A, AC, DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000M Ω min
- Temperature range: -25° C~+85° C

■ HOUSING

- Part No. : H2012-NP-SH
- Poles : 02-16P
- Housing Material: PA66 UL94V-2
- The Dimension Marked “▼” Must Be Recorded

| Part No | Dimensions (mm) | |
|---------|-----------------|-------|
| | A | B |
| 02 | 2.00 | 5.20 |
| 03 | 4.00 | 7.20 |
| 04 | 6.00 | 9.20 |
| 05 | 8.00 | 11.20 |
| 06 | 10.00 | 13.20 |
| 07 | 12.00 | 15.20 |
| 08 | 14.00 | 17.20 |
| 09 | 16.00 | 19.20 |
| 10 | 18.00 | 21.20 |
| 11 | 20.00 | 23.20 |
| 12 | 22.00 | 25.20 |
| 13 | 24.00 | 27.20 |
| 14 | 26.00 | 29.20 |
| 15 | 28.00 | 31.20 |
| 16 | 30.00 | 33.20 |

XYDZ® 东莞市祥运连接器有限公司
 Dongguan XiangYun Connectors CO., Ltd

| | |
|----------------------------|--|
| 一般公差 GENERAL TOLERANCE: | 0±0.30 .0±0.25 .00±0.20 .000±0.05 |
| 绘图/DR | PPZ Data |
| 审核/CHECK | 陈雄军 |
| 批准/APPRO | 胡进 |
| 日期/DATE | 2019-06-03 |

| | | | |
|-------------------|-----|-------------------|-------------------------|
| 投影法 Projection | | 品名 (PART NAME) | SAN 2.00mm 180° Housing |
| 单位 Unit | MM | 料号 (PART NO) | H2012-NP-SH |
| 比例/Scale | 1:1 | 状态码 | C |
| 大小/Size | A4 | | |
| 页码/SHEET | 1/1 | | |
| 版本/Rev | B | | |

| | | | | | |
|-------------|--|------------|----------|--|--|
| 更新图面 | | 2019-06-03 | PPZ Data | | |
| 新版本 | | 2018-12-21 | PPZ Data | | |
| 说明 | | 日期 | 承认 | | |
| DESCRIPTION | | DATE | APPRO. | | |
| 版次 | | | | | |
| REV. | | | | | |