

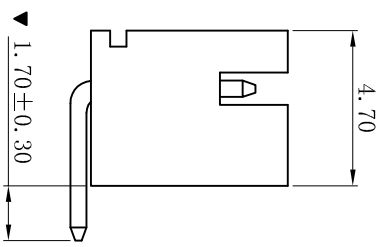
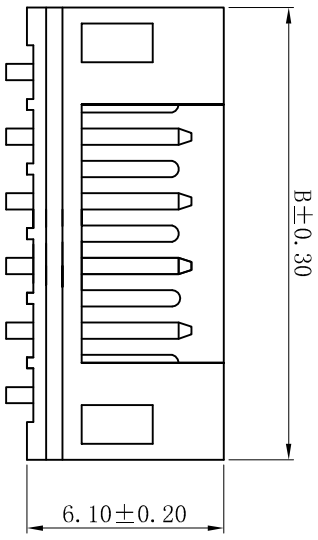


RoHS

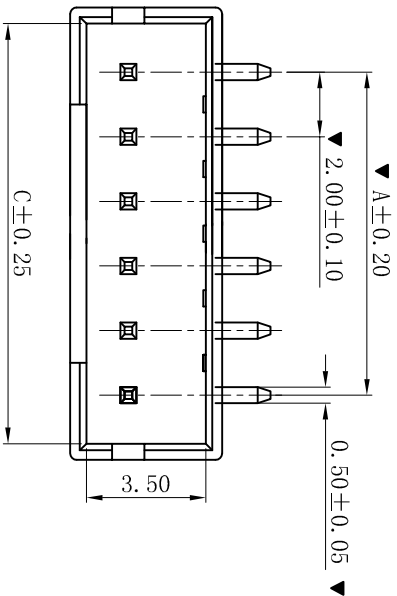

P.C.B LAYOUT

- SPECIFICATIONS**
- Voltage rating: 100V AC, DC
 - Current rating: 2A, AC, DC
 - Withstanding Voltage: 800V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- WAFER**
- Part No.: W2001RB-NP-B-WL1.7
 - Poles : 02-16P
 - Housing Material: PA66 UL94V-0
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded
PIN L=0.50x9.90mm

Poles	Dimension (mm)		
	A	B	C
02	2.00	6.00	5.00
03	4.00	8.00	7.00
04	6.00	10.00	9.00
05	8.00	12.00	11.00
06	10.00	14.00	13.00
07	12.00	16.00	15.00
08	14.00	18.00	17.00
09	16.00	20.00	19.00
10	18.00	22.00	21.00
11	20.00	24.00	23.00
12	22.00	26.00	25.00
13	24.00	28.00	27.00
14	26.00	30.00	29.00
15	28.00	32.00	31.00
16	30.00	34.00	33.00

XYDZ® 东莞市祥运连接器有限公司
 Dongguan XiangYun Connectors CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05
绘图/DR	陈雄军
审核/CHK	陈雄军
批准/APPRO	胡进
日期/DATE	2019-07-18

更新图面	2019-06-03	陈雄军
修訂版本	2015-11-04	陈雄军
变更图宽格式内容	2013-12-27	陈雄军
新版本	2011-05-24	陈雄军

更新图面	2019-06-03	陈雄军
修訂版本	2015-11-04	陈雄军
变更图宽格式内容	2013-12-27	陈雄军
新版本	2011-05-24	陈雄军

投影法 Projection	第一角	品名 (PART NAME)	PH 2.00mm 90° Wafer Connector Series	料号 (PART NO)	W2001RB-NP-B-WL1.7	状态码	C
单位 Unit	MM	比例/Scale	1:1	页码/SHEET	1/1		
大小/Size	A4	版本/Rev	D				
说明 DESCRIPTION	说明	日期 DATE	2011-05-24	日期/DATE	2019-07-18	承认 APPRO.	陈雄军

1 2 3 4 5 6 7 8 9 10