

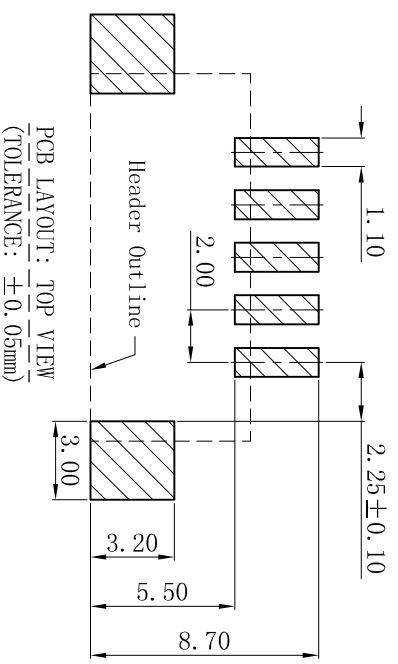


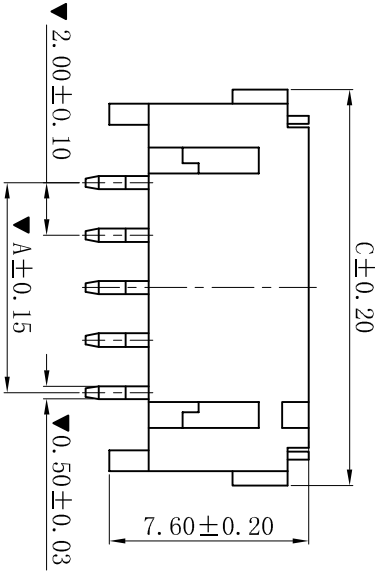


ROHS

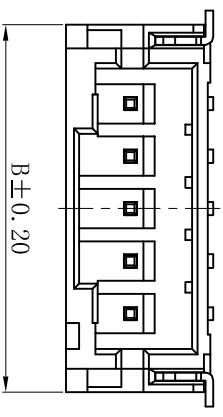

- SPECIFICATIONS
- Voltage rating: 100V AC, DC
  - Current rating: 2A, AC, DC
  - Withstanding Voltage: 800V AC/minute
  - Insulation resistance: 1000MΩ min
  - Temperature range: -25° C~+85° C
  - Contact resistance: 20mΩ max
- WAFER
- Part No. : W2001SR-NP-JD
  - Poles : 02-16P
  - Housing Material : PA9T UL94V-0
  - Pin Material : Brass
  - Solder Tabs Material : Phosphor Bronze
  - Contact Area Plating : Tin-Plated
  - The Dimension Marked “▼” Must Be Recorded

Poles	Dimension (mm)		
	A	B	C
02	2.00	8.00	9.10
03	4.00	10.00	11.10
04	6.00	12.00	13.10
05	8.00	14.00	15.10
06	10.00	16.00	17.10
07	12.00	18.00	19.10
08	14.00	20.00	21.10
09	16.00	22.00	23.10
10	18.00	24.00	25.10
11	20.00	26.00	27.10
12	22.00	28.00	29.10
13	24.00	30.00	31.10
14	26.00	32.00	33.10
15	28.00	34.00	35.10
16	30.00	36.00	37.10

D	更新图面	2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE: ±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE: ±1°	0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE: ±1°
C	修打版本	2015-11-04	陈雄军	绘图/DR	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军	审核/CHKC	陈雄军
A	新版本	2011-05-24	陈雄军	核准/APPRO	胡进
H	版次 REV.	说明 DESCRIPTION	日期 DATE	承认 APPRO.	日期/DATE

**XYDZ® 东莞市祥运连接器有限公司**  
Dongguan XiangYun Connectors CO., Ltd

投影法  
Projection  
单位 Unit  
MM

品名  
(PART NAME)  
PH 2.00mm SMT 90° Wafer  
Connector Series

料号  
(PART NO)  
W2001SR-NP-JD

页码/SHEET  
1/1

版本/REV  
D

状态码  
C